



1. Cotton Gloves



2. Multi-Purpose Rubber Coated Gloves



3. Polka Dot Gloves



4. Argon Coated Leather Gloves



5. Semi Leather Gloves



6. Heat Resistant Gloves



7. Full Leather Glove



8. Leather Protector Gloves



9. Nitrile Gloves 13" / 18"



10. Neoprene Gloves



11. Latex / Nitrile Disposable Gloves



12. Rubber Insulating Gloves



13. Delta Plus Venicut F07 Cut Resistant Glove



14. MAPA 395 Gloves (Cut, Acid, Heat Resistant)



15. Stainless Steel Gloves



16. Kevlar Arm Sleeve, Kevlar Gloves



17. Fireman Gloves



18. Armattec Impact Glove



19. Anti Dogbite Gloves



20. Novax Rubber Insulating Sleeves



21. Isolation gown



22. Lab Coat



23. PE Disposable Apron



24. PVC / Neoprene Apron



25. Anti Static Smock Jumpsuit



26. Cotton Coverall / Jacket



27. Portwest Disposable / Chemical Coverall



28. Elastic Vest



29. Custom made Safety Vest



30. Netting Safety Vest



31. LV Rescue Kit



32. ARC Flash Kit Products



33. Welding Garments

34. 3 Ply / 4 Ply Carbon Mask
(Ear Loop / Tie-On)

35. Disposable Mask



36. Honeywell N95 H910 Plus Mask



37. Dräger Half Face 3500 Mask



38. Dräger Full Face X-plore 5500 Mask (Twin Filter)



39. Dräger Full Face X-plore 6300 Mask (Single Filter)

40. Dräger X-plore
1720V41. Dräger Single Gas Filters
(6738797) A2B2E2K2HgP3 R D42. Dräger X-Plore Pad
Retainer (6738038)43. Dräger X-Plore Pad P2 R
(6738002)44. Dräger X-Plore Pad Base
(6738039)45. Dräger X-Plore Pure P3 R
(6738354)46. Dräger Particle Filter Bayonet P3 R
(6738011)47. Dräger Combi Filter Bayonet
(6738817) A1B1E1K1HgP3 R D
(Multi Gas, Organic Vapours,
Mercury & Ammonia Filter)48. Dräger X-Plore Gas Filter A1
(6738872)
(Organic Vapours Filter)49. Dräger X-Plore Gas Filter
A1B1E1K1 (6738816)
(Multi Gas & Ammonia Filter)50. Dräger X-Plore Gas Filter
A1B1E1 (6738778)
(Multi Gas & Organic Vapours Filter)

51. 3M Ultrafit Earplug SNR 29 db

52. Honeywell Disposable
Earplug 33 db53. Disposable Earplug
SNR 35db

54. Earplug Dispenser



55. Ear Muff



56. Centurion SANA Ear Muff



57. Honeywell Ear Muff

58. Head & Face Protection

CENTURION® Martindale®



59. Granite Wind



60. New -Tech Welding Shield



61. Diamond VI Wind



62. ONYX2 BLANC



63. Dräger Escape Hoods



64. Dräger Escape Set



65. Air Coltán Hardcap



66. High Intensity Reflective Sticker



67. Proguard Face Shield & Holder



68. Safety Helmet Ratchet




69. Safety Helmet PHSL



70. Head Lamp



71. Pelican Torch Light

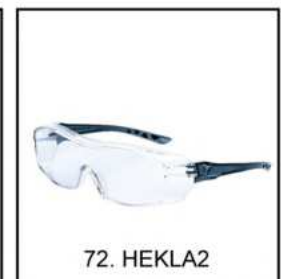

72. HEKLA2



73. Lespex E3030



74. Merlin Eyewear



75. Worksafe Firefly Eyewear



76. Worksafe Raider Eyewear



77. Duospex E387



78. Visitor Overspectacles



79. 3M Safety Goggle



80. Service, Inspection & Rental Services for Dräger SCBA Set



81. Deb Oxybac
Antibacterial Hand Wash



82. Deb Instant Foam
Hand Sanitiser



83. Deb Stoko Protect Cream



84. Swarfega Heavy Duty
Hand Cleaner



85. Deb Suprega Plus
Heavy Duty Hand Cleaner



86. Deb Hand Wash
Refresh Foam



87. Deb Hair & Body
Shampoo



88. Deb Gritty Foam
Heavy Duty Cleaner



89. Mercury Spill Kit



90. 3M Spill Sorbent Kit



91. 3M Spill Kit 31 gal



92. 120L or 240L Dispenser
Cart Spill Kit



93. 20L Portable Spill Kit



94. SPC Economy Portable
Spill Kit



95. Clinical Waste Bin
(10, 18, 35 L)



96. Biohazard Step Bin



97. SPC Allwik Kaddie Sorbent



98. Hazardous Material
Disposal Bag



99. Shoes Cover & Clip Cap



100. Arm Sleeve Cover
Knee length boot cover



101. Italy Single Mop Bucket -
22L (Down Press)



102. Biohazard TT Pedal Bin



103. TT Pedal Bin



104. Eyewash Saline Solution



105. Guardian Eye Wash
Water Preservative



106. AED



107. Safety Knife



108. ARSCK



1. Biohazard Zip Lock Bag
2. Confirming Blood Stopper
3. Crepe Bandage / W.O.W.
4. PE Blue Plaster (Metal Detectable) / Assorted Elastic Fabric Plaster
5. Burn Shield Burn Dressing
6. Ice Pack

109. First Aid Kit Refill Content

110. King's Safety Shoes



KWS 200



KWD 207

KING'S
by Honeywell

KWD106



KWD206



KWD301



KWD205

111. Topsafe Safety Shoes

TOPSAFE®
SAFETY FOOTWEAR

TS321



TS8304



TS303



TS501



TS901

112. Nitti Safety Shoes



Low Cut 21281



Low Cut 21981



Mid Cut 22281



Mid Cut 22681



High Cut 23281

113. Jogger Safety Shoes



OXYSAFE SHOES



GUSTO S2



CERES

114. Oscar Safety Shoes



803



125



802



830



829



136



172



163



126



127



128



805



806



903



808

115. Black Hammer Safety Shoes



BH 4666



BH 4663



BH 4660



S114

116. Deltaplus Safety Shoes



Miami S1



Gargas II



Deltasport



Boot



KAZAK EH

117. Neuking Safety Shoes



NKR53



NKR50



NKR56



NKR55



NKL20



NKL29



NKC90K



NKC93K



NKC95

118. ASYS Safety Shoes



Godzilla

Osaka

Samurai

Z1281

119. Rubber Safety Boots / PVC Boots



120. Red Wing Safety Shoes



9233



2245



2549



3209



3228



6719

121. Modasafe
Safety Shoes

M2551



M2511

122. Fireman Boots

123. Safety Padlock with
Compact Cable 20cm / 40cm124. Clamp On Breaker Lock
out / Oversized Clamp On125. Durable Standard Ball
Valve Lockout Devices126. Adjustable Ball Valve
Lockout

127. Gate Valve Lockout

128. Adjustable Gate Valve
Lockout

129. 120 / 277V Breaker Lockout Pouch




130. Valve Lockout Pouch Kit



131. Lockout Tagout Station Equipment



132. Padlock Station

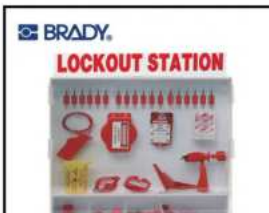133. Combined Lockout &
Lock Box Station134. Extra Large Enclosed
Lockout Station

135. Hasps

136. All Purpose Cable
Lockout137. Butterfly Valve
Lockout



138. Transparent Emergency Stop Lockout for Wall Switch



139. Non conductive padlock - change it



140. Brady PadLock




141. Switch and Button Emergency Stop Lockout



142. Control Panel Lockout for Touch Panel



143. Medium Circuit Breaker Lockout



144. Miniature Circuit Breaker Lockout



145. Universal Valve Lockout




146. SDS Station



147. Brady Label Printer



148. Weight Scale

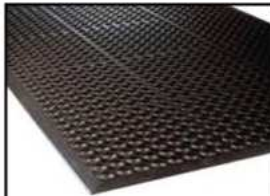

149. Kitchen Mat



150. Switchboard Matting




151. Sticky Blue Mat



152. Rubber Ramp



153. Outdoor Anti Slip For Stair Nosing & Ladder Rung

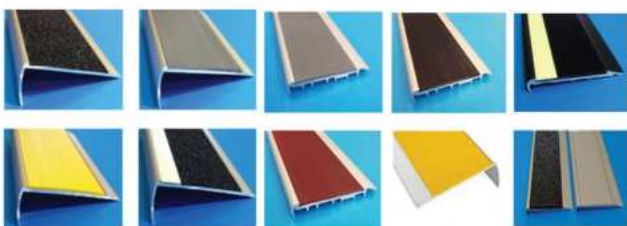

154. Indoor Anti Slip Stair Nosing



155. Anti Fatigue Mat




156. Bus/Truck Wheel Stopper



157. Rubber Hump



158. Channel Cable Hump / Kerb Ramp



159. Corner Protector (H01)



160. Rubber Wheel Chock (190 W x 170 H x 240mm L)



161. Lorry Stopper



162. Trailer & Car Clamp



163. Trailer Stabilizing Jacks



164. Ratchet Beam Jacks



165. Solar LED Flashing Lamp / Blinker



166. Solar Blinker Light



167. LED Solar Chevron Arrow



168. Traffic Triangle



169. Pavement Markers / Tiger Eye



170. Metal Bollard 1m x 6"



171. Retroreflective Flag



172. String Delineator

173. Rubber Dock Bumper
(260 x 255 x 105 x 330mm)

174. LED Solar Chevron Board



175. Traffic Control Flagman



176. Traffic Baton



177. 30" PE Rubber Base (3kg)

height 80 x 750 x 200mm
178. Elastic Pole


179. Cone Topper Warning Tape

height 1150mm
180. PE Bollard

181. Collapsible Square Cone



182. Collapsible Cone

0.8m (H) x 0.5m (W) x 1.0m (L)
1m (H) x 0.5m (W) x 1.2m (L)
183. Plastic Hoarding & Barrier

184. Retractable Cone Pole



185. Plastic Chain 25m



186. Cleaning Cart



187. Portable Barrier Gate

960 X 250 x 2500 mm (Open)
188. Foldable & Expandable Barrier(63.5 x 360 x 880mm)
189. Stainless Steel Stackable Q-up Stand(63.5 x 320 x 910mm)
190. Stainless Steel Retractable Q-up Stand1m (H) x 50m p / roll
191. Plastic Barrier Fencing1200 mm (H) x 3.5m (L)
192. Expandable Barricade



193. Stainless Steel Display Stand



194. Portable Speaker with Mic



195. Pole Signages



196. Stainless Steel 3 Tiers Trolley



197. PU Foam Protection

13"/ 20"/ 24"/ 32"/ 40"
198. Outdoor Convex Mirror

199. Sand Bag

18"/ 24"/ 24"/ 32"
200. Outdoor Convex Mirror20", 24"
201. Indoor Convex Mirror

202. DOME Mirror



203. Cleaning Tray



204. Stainless Steel Recycle Bin



205. Plastic Recycle Bin



206. Drum / Ibc Pallet



207. Waste Storage for Light Bulb & Battery



208. Lab Spill Tray, Oil Waste Can, Spill Pallet, Cabinet



209. Thermoplastic / PU / Epoxy Marking



210. Dräger Alcohol Tester



211. Sound Level Meter Tester



212. Lecture chairs



213. Office Chair Set



214. FUME Extraction System



215. Anchor Point



216. Anchor Cable



217. Jet / Spray Nozzle

Battery Operated
218. Photoelectric Smoke Detector

219. PA System



220. Hailer



221. Gas Detectors Supply, Calibration Rental Service



222. Fire Fighting Equipment



223. Fireman Helmet



224. Dräger SCBA Mask & Cylinder Cover



225. Smoke Tester



226. Ultra Light Bump Cap



227. Coldstore Jacket



228. Fireman Suit



229. Rain Suit



230. NOMEX IIIA Coverall



231. Aluminium Coat / Dräger CPS 5900, 7900



232. S. Steel / Mild Steel Cabinet



233. Inflatable Life Jacket



234. Life Jacket



235. Stearns I222



236. Cosalt Life Jacket



237. Life Buoy, Lifeline



238. Jobbird Cabinet



239. Helicopter Crash Rescue Equipment



240. Fresco Electric Climbing Chair



241. Gate pallet





Escape Chute Systems

Fire Emergency Escape

Oil Rig Emergency Egress System

IECS & LR

Integrated Escape Chute and Life Raft

242. Escape Chute System Products



243. Life Raft



244. Static Rope



245. Wind Sock, Swivel Hoop, Swivel Arm



246. Billy Pugh Marine Cargo Basket



247. GlideLoc Vertical Lifeline Ladder System



248. Inspection/Training Vertical Lifeline / Installation / Inspection



249. Clawline system & Skytac Rail



249. First Range Safety Harness & Lanyard



250. DBI Safety Harness & Lanyard



251. 3M 1390033 Full Body Harness



252. Honeywell Safety Harness & Double Lanyard



253. Skylotec Ignite Neon Harness (size m- 5xl)



254. Inspection/ Training Horizontal Lifeline / Installation / Inspection



255. Horizontal Lifeline System




256. EZ-Line Retractable Horizontal Lifeline System Installation / Inspection



257. Horizontal Lifeline System



258. Cabloc Fall Arrest

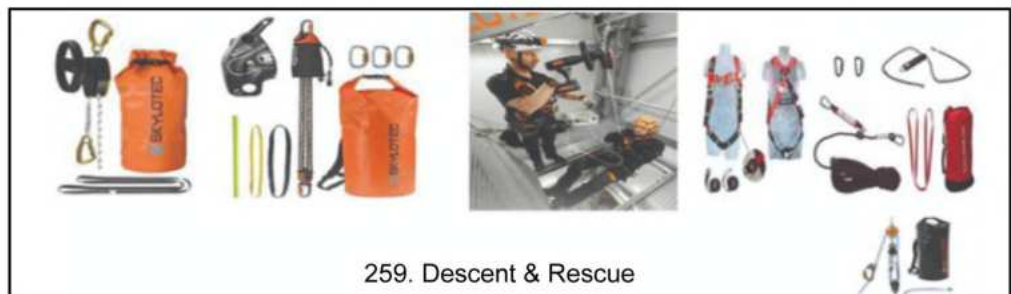

259. Descent & Rescue



260. GlideLoc Fall Arrester



261. I-Beam and Trolley System




262. Suspension Trauma Strap



263. SRL



264. Flexiguard Rail / Supported Ladder Access System / Counter Weight Jib System

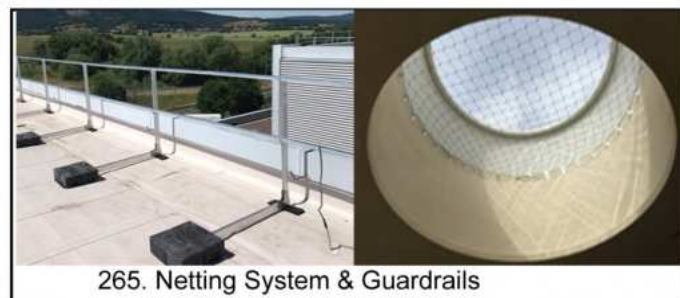

265. Netting System & Guardrails

How To Order ?

Mandatory Sign

STEP : Codes >

Size

300mm (H) x 200mm (W)
400mm (H) x 300mm (W)
600mm (H) x 400mm (W)

Material

> THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker



MS 001



MS 002



MS 003



MS 004



MS 005



MS 006



MS 007



MS 008



MS 009



MS 010



MS 011



MS 012



MS 013



MS 014



MS 015



MS 016



MS 017



MS 018



MS 019



MS 020



MS 021



MS 022



MS 023



MS 024



MS 025



MS 026



MS 027



MS 028



MS 029



MS 030



MS 031



MS 032



MS 033



MS 034



MS 035



MS 036



MS 037



MS 038



MS 039



MS 040



MS 041



MS 042



MS 043



MS 044



MS 045



MS 046



MS 047



MS 048



MS 049



MS 050



MS 051



MS 052



MS 053



MS 054



MS 055



MS 056

How To Order ?

STEP : Codes >

Size

300mm (H) x 200mm (W)
400mm (H) x 300mm (W)
600mm (H) x 400mm (W)

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker

 Dilarang Merokok No Smoking	 Dilarang Menyala Api No Naked Flame	 Dilarang Meletak Kenderaan Di Sini No Parking	 Dilarang Masuk Ruangan Tertutup Confined Space	 Panas Jangan Sentuh Hot Do Not Touch	 Jangan Melangkah Do Not Step	 Jangan Sentuh Do Not Touch
PS 001	PS 002	PS 003	PS 004	PS 005	PS 006	PS 007
 Dilarang Menggunakan Telefon Bimbit Do Not Use Mobile Phone	 Dilarang Bergambar Photography No Allowed	 Dilarang Membawa Makanan Dan Minuman Manis No Food And Sweet Drink Allowed	 Dilarang Pakai Kasut Selipar No Slipper	 Dilarang Minum Arak Sebelum Kerja No Alcohol Before Working	 Dilarang Menghalang Pili Bomba Ini Do Not Block This Fire Hydrant	 Dilarang Menghalang Do Not Obstruct
PS 008	PS 009	PS 010	PS 011	PS 012	PS 013	PS 014
 Dilarang Menyalahgunakan Dadah No Drugs	 Dilarang Berenang No Swimming	 Jangan Berdiri Berhampiran Dengan Bergerak Do Not Stand Near Moving Arm	 Jangan Menunggang Forklift Do Not Riding On Forklift	 Jangan Berada Di Bawah Beban Yang Digantung Do Not Position Yourself Under A Suspended Load	 Jangan Menggunakan Tangga Do Not Use Ladder	 Dilarang Berlari Do Not Run
PS 015	PS 016	PS 017	PS 018	PS 019	PS 020	PS 021
 Dilarang Menggunakan Lif Semasa Kebakaran In The Event Of Fire Do Not Use This Lift	 Dilarang Meletak Motosikal No Motorcycle Parking	 Dilarang Meletak Basikal No Bicycle Parking	 Dilarang Memakai Barang Perhiasan Do Not Wear Jewelry	 Dilarang Masuk Bagi Pesakit Yang Ada Peranti Jantung Person With Cardiac Pacemakers Cannot Enter	 Dilarang Membuang Sampah No Dumping	 Air Ini Tidak Dibenarkan Minum Do Not Drink This Water
PS 022	PS 023	PS 024	PS 025	PS 026	PS 027	PS 028
 Tanggalkan Kasut Sebelum Masuk Take Out The Shoes Before Enter	 Jangan Bercakap Please Silent	 Kenderaan Berat Dilarang Masuk Heavy Vehicle Is Not Allowed To Access	 Dilarang Memakai Topi Di Dalam Permis Ini Motorcycle Helmets Are Prohibited Within In Premises	 Dilarang Buka Do Not Operate	 Haiwan Tidak Dibenarkan No Pet Allowed	 Dilarang Meludah Do Not Spit
PS 029	PS 030	PS 031	PS 032	PS 033	PS 034	PS 035
 Anjing Tidak Dibenarkan No Dog	 Anjing Tidak Dibenarkan Kecuali Anjing Pengawal No Dog Except Guide Dogs	 Rendahkan Suara Lower Down Your Voice	 Dilarang Mengguna Forklift Forklift Truck Prohibited	 Dilarang Mengguna Forklift Tanpa Kebenaran Operating This Forklift Without Authorization Or Training Is Strictly Prohibition	 Dilarang Mencangkung Di Atas Mangkuk Tandas Duduk Do Not Squat On The Sitting Toilet Bowl	 Kawasan Peribadi Dilarang Masuk Private Property No Trespassing
PS 036	PS 037	PS 038	PS 039	PS 040	PS 041	PS 042
 Pejalan Kaki Dilarang Melintas Melalui Pintu Ini No Pedestrian Crossing Against This Gate	 Dilarang Melintas No Thoroughfare	 Dilarang Masuk No Access	 Dilarang Masuk Kecuali Dilatih Dan Dapat Kebenaran No Access Unless Trained And Authorized	 Dilarang Masuk Tanpa Urusan No Admission Authorized Personnel Only	 Dilarang Mengguna Perancah Yang Tidak Lengkap Scaffolding Incomplete Do Not Use	 Dilarang Baring Di Atas Bangku Do Not Sleep On Bench
PS 043	PS 044	PS 045	PS 046	PS 047	PS 048	PS 049

How To Order ?

Warning Sign


STEP : Codes >

Size

300mm (H) x 200mm (W)
400mm (H) x 300mm (W)
600mm (H) x 400mm (W)

Material

> THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker

 WS 001	 WS 002	 WS 003	 WS 004	 WS 005	 WS 006	 WS 007
 WS 008	 WS 009	 WS 010	 WS 011	 WS 012	 WS 013	 WS 014
 WS 015	 WS 016	 WS 017	 WS 018	 WS 019	 WS 020	 WS 021
 WS 022	 WS 023	 WS 024	 WS 025	 WS 026	 WS 027	 WS 028
 WS 029	 WS 030	 WS 031	 WS 032	 WS 033	 WS 034	 WS 035
 WS 036	 WS 037	 WS 038	 WS 039	 WS 040	 WS 041	 WS 042
 WS 043	 WS 044	 WS 045	 WS 046	 WS 047	 WS 048	 WS 049
 WS 050	 WS 051	 WS 052	 WS 053	 WS 054	 WS 055	 WS 056

How To Order ? Emergency Escape Signs

STEP : Codes >

Size

300mm (H) x 200mm (W)
400mm (H) x 300mm (W)
600mm (H) x 400mm (W)

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker

H150mm x W300mm



ES 001



ES 006



ES 002



ES 007



ES 003



ES 008



ES 004



ES 009



ES 005



ES 010

H150mm x W450mm



ES 011



ES 012



ES 013



ES 014



ES 015



ES 021



ES 016



ES 017



ES 018



ES 019



ES 020

H150mm x W150mm



ES 021



ES 025



ES 022



ES 026



ES 023



ES 027



ES 024



ES 028

Assembly Point Signs



APS 001



APS 002



APS 003



APS 004



APS 005



APS 006



APS 007



APS 008



APS 09



APS 010



APS 011



APS 012

KIBLAT

300mm(H) x
400mm(W) COM 147



APS 013
3D Assembly
Point



APS 014
3D Assembly
Point

How To Order ?

First Aid Signs

STEP : Codes > Size >

Size Available

H200mm x W200mm | H200mm x W400mm | H300mm x W400mm | H400mm x W300mm | H600mm x W400mm

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker



SC 011



SC 012



SC 013



SC 014



SC 015



SC 016



SC 017



SC 018



SC 019



SC 020



SC 021



SC 022



SC 024



SC 025



SC 031



SC 026



SC 027



SC 028



SC 029



SC 023



SC 032



SC 037



SC 030



3D SC 030



SC 031



SC 032



SC 033



SC 034



SC 035



SC 036

Fire Safety Equipment Signs



150mm x 150mm
200mm x 200mm

FS 001



FS 002



FS 003



FS 004



FS 005



FS 006



FS 007



FS 008



150mm x 150mm
200mm x 200mm

FS 009



FS 010



FS 011



FS 012



FS 013



FS 014



FS 015



FS 016



150mm x 150mm
200mm x 200mm

FS 017



FS 018



FS 019



FS 020



FS 021



FS 022



450mm(H) x 300mm(W) COM 137

FS 023



3D Sign Luminescent



Sticker On The Floor



600mm(H) x 400mm(W) FS

How To Order ?

STEP : Codes >

Size

>

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker



FSS-001P



FSS-WS026P



FSS003P



FSS004P



FSS-005P



FSS-WS028P



FSS-007P



FSS-008P



FSS009P



FSS010P



FSS011P



FSS012P



Bahaya Meletup
Explosive

C001



Bahaya Terbakar
Flammable

C002



Bahaya Mengoksida
Oxidizing

C003



Gas Termampat
Gas Under Pressure

C004



Toksik
Toxic

C005



Bahaya Mengakis
Corrosive

C006



Bahaya Aspirasi
Respiratory Sensitization

C007



Bahaya Kimia
Memudaratkan
Harmful Irritant

C008



Berbahaya Kepada
Alam Sekitar
Hazardous To The Environment

C009

How To Order ?

STEP : Codes >

Size
140mm (H) x 70mm (W)

Material
THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker

Lock-Out Tag-Out Tag

DANGER DILARANG BEROPERASI DO NOT OPERATE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 001	DANGER DIKUNCI LOCKED OUT DILARANG BEROPERASI DO NOT OPERATE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 002	DANGER DIKUNCI LOCKED OUT This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 003	DANGER DILARANG BEROPERASI DO NOT OPERATE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 004	DANGER DILARANG PASANGKAN DO NOT START This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 005	DANGER DILARANG GUNA DO NOT USE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 006	DANGER DILARANG PASANG SUIS DO NOT SWITCH ON This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 007	DANGER DILARANG DO NOT ENERGIZE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 008
--	---	--	--	---	--	---	--

DANGER DILARANG TUTUPKAN SUIS DO NOT SWITCH OFF This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 009	DANGER DILARANG BUKA INJAP DO NOT OPEN VALVE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 010	DANGER DILARANG TUTUP INJAP DO NOT CLOSE VALVE This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 011	DANGER DILARANG BEROPERASI DO NOT OPERATE Maintenance Department This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 012	DANGER DILARANG BEROPERASI DO NOT OPERATE Electricians At Work This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 013	DANGER DILARANG BEROPERASI DO NOT OPERATE Production This lock/tag may only be removed by: NAMA: _____ Tarikh: _____ TAG 014	DANGER DILARANG BEROPERASI DO NOT OPERATE I certify that the following tasks have been performed to isolate the equipment: • Isolated all potential hazards and energy sources • Verified all potential hazards and energy sources • Properly equipped for situation • De-energized all equipment • Verified and locked out energy sources • Released all stored energy • Tested equipment for zero energy state • Cleared performance surface and floor area NAMA: _____ Tarikh: _____ TAG 015	DANGER PERMIT SAVE LIFE DO NOT OPERATE NAME: _____ ID: _____ TAG 016
--	---	---	--	--	--	--	--

DANGER PERMIT SAVE LIFE DO NOT OPERATE DATE (DDMMYY) TAG 017	DANGER DO NOT OPERATE Maintenance Department This LOCK / Tag May Only Be Removed By: NAME: _____ DATE: _____ CONTACT: _____ TAG 018	DANGER The energy source has been LOCKED OUT. Only the individual who signed the reverse side may remove this LOCK / TAG. REMARK: _____ TAG 019	DANGER Punca kuasa ini sudah di kunci Unauthorized removal of this lock / tag may result in immediate discharge. This Energy source has been LOCKED OUT. Unauthorized removal of this lock / tag may result in immediate discharge. Remarks: _____ Back Page 1	DANGER DO NOT REMOVE THIS TAG TAG & LOCK TO BE REMOVED BY PERSON SHOWN ONLY! SEE OTHER SIDE Back Page 2	DANGER DO NOT REMOVE THIS TAG DO NOT REMOVE THIS LOCK. IT IS HERE TO PROTECT MY LIFE SEE OTHER SIDE Back Page 3	DANGER DO NOT USE THIS SCAFFOLD KEEP OFF DO NOT ALTER Date: _____ Completed Person: Signature _____ Comments: _____ TAG 030	STOP UNSAFE FOR USE Date / Comment / Signature _____ TAG 031
---	--	---	---	--	--	---	---

DANGER DILARANG PASANG SUIS KERJA SEDANG DIJALANKAN DO NOT SWITCH ON UNDER MAINTENANCE NAMA: _____ Tarikh: _____ TAG 020	DANGER DILARANG TUTUP INJAP DO NOT CLOSE VALVE NAMA: _____ Tarikh: _____ TAG 021	DANGER DILARANG BUKA INJAP DO NOT OPEN VALVE NAMA: _____ Tarikh: _____ TAG 022	DANGER Punca kuasa ini sudah di kunci Unauthorized removal of this lock / tag may result in immediate discharge. This Energy source has been LOCKED OUT. Unauthorized removal of this lock / tag may result in immediate discharge. Remarks: _____ Back Page 4	PLATFORM LADDER IDENTIFICATION TAG PL: _____ SAFE FOR USE CLEAN UP AFTER USE Front - TAG 023	INSPECT BY _____ DATE _____ Back - TAG 023	EMERGENCY SHOWER & EYE WASH TEST RECORD RESPECT THIS UNIT CAREFULLY BEFORE SIGNING INSPECTION RECORD DATE BY DATE BY Front - TAG 024	EMERGENCY SHOWER & EYE WASH TEST RECORD RESPECT THIS UNIT CAREFULLY BEFORE SIGNING INSPECTION RECORD DATE BY DATE BY Back - TAG 024	AWAS RONGGOK SILA BERKASUT, ATAU MENGGAMUT TUBUH SE TAPIA PUSKALAN KURUS DISEKUT SCAFFOLD SILA BERKASUT, ATAU MENGGAMUT TUBUH SE TAPIA PUSKALAN KURUS DISEKUT Front - TAG 025	AWAS RONGGOK SILA BERKASUT, ATAU MENGGAMUT TUBUH SE TAPIA PUSKALAN KURUS DISEKUT SCAFFOLD SILA BERKASUT, ATAU MENGGAMUT TUBUH SE TAPIA PUSKALAN KURUS DISEKUT Back - TAG 025
--	--	--	---	--	---	--	---	---	--

AWAS TIDAK SELAMAT CAUTION UNSAFE NAMA: _____ Tarikh: _____ TAG 026	AWAS ROSAK CAUTION OUT OF ORDER NAMA: _____ Tarikh: _____ TAG 027	TAG INI HANYA BOLEH DITANGGAL OLEH: This Tag / Tag may only be removed by: NAMA: _____ Tarikh: _____ Remarks: _____ Back Page 5	FIRE EXTINGUISHER INSPECTION RECORD EXTINGUISHER No. _____ 12 11 10 9 8 7 6 5 4 3 2 1 JAN FEB MAR APR MAY JUN JULY AUG SEPT OCT NOV DEC TAG 028	POWER TOOLS & OTHER'S EQUIPMENT INSPECTION DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 023	BODY HARNESS INSPECTION BH S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 024	LIFTING EQUIPMENT INSPECTION PMA: _____ DATE INSPECTED _____ Back - TAG 024	BODY HARNESS INSPECTION BH S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 025	AWAS TIDAK SELAMAT CAUTION UNSAFE NAMA: _____ Tarikh: _____ TAG 026	AWAS ROSAK CAUTION OUT OF ORDER NAMA: _____ Tarikh: _____ TAG 027	TAG INI HANYA BOLEH DITANGGAL OLEH: This Tag / Tag may only be removed by: NAMA: _____ Tarikh: _____ Remarks: _____ Back Page 5	FIRE EXTINGUISHER INSPECTION RECORD EXTINGUISHER No. _____ 12 11 10 9 8 7 6 5 4 3 2 1 JAN FEB MAR APR MAY JUN JULY AUG SEPT OCT NOV DEC TAG 028	POWER TOOLS & OTHER'S EQUIPMENT INSPECTION DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 023	BODY HARNESS INSPECTION BH S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 024	LIFTING EQUIPMENT INSPECTION PMA: _____ DATE INSPECTED _____ Back - TAG 024	BODY HARNESS INSPECTION BH S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 025	LADDER INSPECTION S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 023	LADDER INSPECTION S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 024	GENIE LIFT INSPECTION S/N: _____ DATE INSPECTED _____ NEXT INSPECTION _____ Back - TAG 025
---	---	--	--	--	--	---	--	---	---	--	--	--	--	---	--	---	---	---

Sticker Size : H50mm xW50mm

How To Order ? Poster Signs

STEP : Codes >

Size
Size Available
H400mm x W300mm
H600mm x W400mm

Material
THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker



POS 001



POS 002



POS 003



POS 004



POS 005



POS 006




POS 007



POS 008



POS 009

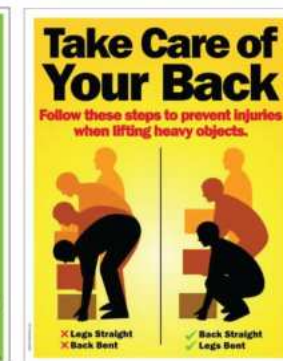

POS 010



POS 011



POS 012



POS 013



POS 014



POS 015



POS 016



POS 017



POS 018



POS 019



POS 020



POS 021

How To Order ?

Mix And Match

STEP : Codes >

Size

>

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN PENSTORAN BUANGAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

Cecair Terbakar
Flammable Liquid

Bahan Mengapik
Corrosive

Bahan Terbakar
Flammable Solid

Toksik
Toxic substance

Dilarang Merokok
No Smoking

600mm (H) x 1200mm (W) COM 167

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

Anda Sedang Memasuki Zon Pengangkutan Keselamatan
Safety First

PERATURAN MANDATORI
Mandatory Rules

PELANJUTAN MANDATORI
Mandatory Rules

SEMULA KAWATAN MANDATORI
Mandatory Rules

600mm (H) x 1200mm (W) COM 168

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

WEAR SAFETY HELMET
Gunakan Topi Keselamatan

FALLING OBJECT
KEEP OUT

DANGER
Lifting In Progress

Bahaya Mengangkat Sedang Dikeluarkan
Hazard Lifting In Progress

600mm (H) x 400mm (W) COM 169

Battery Charging Area
AWAS / DANGER

Bahan Mudah Meletup
Explosion hazard

Dilarang Merokok
No Smoking

Dilarang Menyyalakan Api
No Naked Flame

600mm (H) x 400mm (W) COM 170

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 1800mm (W) COM 171

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 1800mm (W) COM 172

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 1200mm (W) COM 173

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

750mm (H) x 1350mm (W) COM 174

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 1600mm (W) COM 175

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

1100mm (H) x 1200mm (W) COM 178

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

300mm (H) x 600mm (W) COM 179

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

300mm (H) x 600mm (W) COM 182

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

23 inch (H) x 7.5 inch (W) COM 184

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 400mm (W) COM 185

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 1500mm (W) COM 176

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

600mm (H) x 1500mm (W) COM 187

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

80mm (H) x 600mm (W) COM 180

80mm (H) x 400mm (W) COM 181

UTAMAKAN KESELAMATAN
Gunakan Alat-Alat Keselamatan Diri Yang Sesuai
Safety First

KAWASAN SIMPANAN BAHAN TERJADUAL
SCHEDULED WASTE STORAGE AREA

SISA BAHAN TOKSIK
TOXIC SUBSTANCES WASTE

SISA CAECIR TIDAK MUDAH TERBAKAR
INFLAMMABLE LIQUIDS

SISA CAMPURAN PELBAGAI BAHAN BERBAHAYA
MIXTURE OF MISCELLANEOUS SUBSTANCES

DILARANG MEROKOK
NO SMOKING

DILARANG MASUK TANPA URUSAN
NO ADMITTANCE AUTHORIZED PERSONNEL ONLY

60mm (H) x 1200mm (W) COM 183

How To Order ? Mix And Match

STEP : Codes >

Size >

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker



600mm (H) x 400mm (W) COM 188



600mm (H) x 600mm (W) COM 189



400mm (H) x 600mm (W) COM 190



600mm (H) x 300mm (W) COM 191



300 (H) x 200mm (W) COM 192



300 (H) x 200mm (W) COM 193



300 (H) x 200mm (W) COM 194



300 (H) x 200mm (W) COM 194



300 (H) x 200mm (W) COM 194



300 (H) x 200mm (W) COM 194



400mm (H) x 600mm (W) COM 195



300 (H) x 400mm (W) COM 198



400mm (H) x 300mm (W) COM 199



300 (H) x 900mm (W) COM 196



300 (H) x 900mm (W) COM 197



24 inch (H) x 96 inch (W) COM 200



18 inch (H) x 22 inch (W) COM 205



600mm (H) x 400mm (W) COM 206



600 (H) x 400mm (W) COM 202



600 (H) x 400mm (W) COM 203



600 (H) x 400mm (W) COM 204



78 inch (H) x 48 inch (W) COM 207

How To Order ?

STEP : Codes >

Size

>

Material

THK 1.5mm PVC
THK 3.0mm Aluminium Composite
Self Adhesive Vinyl Sticker

Glow In The Dark Floor Markers

Provide additional directional information to strengthen your safety way guidance system.



Footprints
Sheet Size:
250 x 350mm
Footprint size:
238 x 104mm
Code: FMT01



75mm Dia
FMT1AL



75mm Arrow
FMT2AL



100 x 100mm
FMT3AL



Marking exit doors




40mm x 5m (Right / Left) - MED04L(R/L)




40mm x 5m (Right / Left) - MED06L2 (R/L)




40mm x 5m (Right / Left) - MED04L3(R/L)



40mm x 5m - MED04L-P



40mm x 5m - MED04LGrn



40mm x 5m - MED04LYelw



40mm x 5m - MED04LBlk

Floor Marking Tape & 5S Labelling

Floor marking tape can be used to mark your facility's aisles, walkways, safety hazards, storage areas and more. Floor tape is available in continuous rolls, corner marks (L, T and cross shapes). Aisle and floor marking tapes are made of heavy duty polyester or vinyl that resists oil, moisture. The marking tape will stick to virtually any dry surface when applied.



Arrow

Size Available - 50x120	76x203	100x250mm
- Yellow : 5S-002-YLW	5S-0021-YLW	5S-0022-YLW
- Green : 5S-002-GRN	5S-0021-GRN	5S-0022-GRN
- Black : 5S-002-BLK	5S-0021-BLK	5S-0022-BLK
- Red : 5S-002-RED	5S-0021-RED	5S-0022-RED
- Blue : 5S-002-BLUE	5S-0021-BLUE	5S-0022-BLUE

Packaging : 20 pcs / Pkt



"+" Marks

Size Available - 50x120	76x203	100x250mm
- Yellow : 5S-003-YLW	5S-0031-YLW	5S-0032-YLW
- Green : 5S-003-GRN	5S-0031-GRN	5S-0032-GRN
- Black : 5S-003-BLK	5S-0031-BLK	5S-0032-BLK
- Red : 5S-003-RED	5S-0031-RED	5S-0032-RED
- Blue : 5S-003-BLUE	5S-0031-BLUE	5S-0032-BLUE

Packaging : 20 pcs / Pkt



"L" Marks

Size Available - 50x120	76x203	100x250mm
- Yellow : 5S-005-YLW	5S-0051-YLW	5S-0052-YLW
- Green : 5S-005-GRN	5S-0051-GRN	5S-0052-GRN
- Black : 5S-005-BLK	5S-0051-BLK	5S-0052-BLK
- Red : 5S-005-RED	5S-0051-RED	5S-0052-RED
- Blue : 5S-005-BLUE	5S-0051-BLUE	5S-0052-BLUE

Packaging : 20 pcs / Pkt



"T" Marks

Size Available - 50 x 120mm

Yellow : 5S-004-YLW	Red : 5S-004-RED
Green : 5S-004-GRN	Blue : 5S-004-BLUE
Black : 5S-004-BLK	

Packaging: 20pcs / Pkt



Footprint

Size Available - 250 x 90mm

Yellow : 5S-006-YLW	Red : 5S-006-RED
Green : 5S-006-GRN	Blue : 5S-006-BLUE
Black : 5S-006-BLK	

Packaging: 20 Pairs / Pkt



Circle

Size Available - Dia 90mm

Yellow : 5S-001-YLW	Red : 5S-001-RED
Green : 5S-001-GRN	Blue : 5S-001-BLUE
Black : 5S-001-BLK	

Packaging: 20 Pcs / Roll

Labelling



Anti Slip Hazard Tape

Size Available - 2" x 60 Feet
3" x 60 Feet
6" x 60 Feet
6" x 24"



Anti Slip Tape

Size Available - 50mm x 18mm



Barricade Tape

Size Available -
- 72mm x 50m - 144mm x 200m
- 72mm x 100m - 720mm x 200m
- 72mm x 200m



Acrylic Foam Tape

Size Available -
- 10mm x 9y - 18mm x 9y
- 12mm x 9y - 24mm x 9y



Floor Marking Tape

Size Available -
- 24mm x 33y - 60mm x 33y
- 36mm x 33y - 72mm x 33y
- 48mm x 33y



iFlexRail™

Column Guard

8,200 Joules**

3.2 Tonne vehicle at 5mph



- ✓ Patented Coupling Technology
- ✓ Any Column Shape or Location
- ✓ Isolated System
- ✓ Hygiene Sealed



iFlex™

Slide Gate

Available in 1000mm, 1500mm and 2000mm widths

- ✓ Stay-Open
- ✓ Telescopic Sliding Motion
- ✓ Space Optimised



iFlex™

Double Traffic Barrier+

28,950 Joules*

8 Tonne vehicle at 6mph



- ✓ Patented Coupling Technology
- ✓ Electrophoretic Coated Base
- ✓ Additional Base Options
- ✓ Hygiene Sealed



iFlex™


Double Traffic Barrier

28,950 Joules*

8 Tonne vehicle at 6mph



- ✓ Patented Coupling Technology
- ✓ Electrophoretic Coated Base
- ✓ Additional Base Options
- ✓ Hygiene Sealed

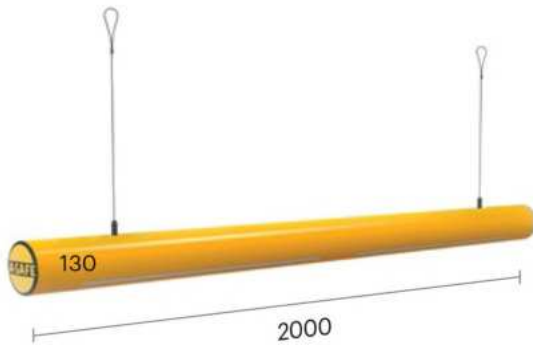

Alarm Bar

- ✓ 102dB Auditory Alert
- ✓ 68lm/M Flashing Red Indicator Strips
- ✓ Double Fitting Gripples For Easy Install
- ✓ 2 Year Battery Life
- ✓ Versatile Overhead Application



FlexiShield™


Column Guard

1,600 Joules*

1.3 Tonne vehicle at 3mph



- ✓ Interlocking Stackability
- ✓ Universal Square & Rectangle Columns
- ✓ Wrap Around Solution
- ✓ Encased Fixings
- ✓ Fork Deflection
- ✓ Simple Installation

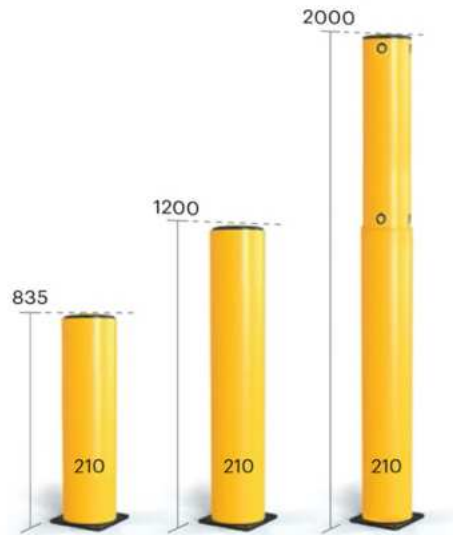

iFlex™

Bollard with Wear Collar

6,900 Joules*

4.3 Tonne vehicle at 4mph



- ✓ Energy Absorbing Core
- ✓ Electrophoretic Coated Base
- ✓ Additional Base Options
- ✓ Wear Collar for Added Protection



iFlex™

Topple Barrier

400kg Horizontal Load

Equivalent 1 Tonne Pallet

- ✓ Protects Pedestrians from Topple Accidents
- ✓ Fork Protection as Standard
- ✓ Electrophoretic Coated Base
- ✓ Additional Base Options

FIBREGLASS PLATFORM STEP LADDERS

150KG RATED | AS 1892



NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS PREMIUM RANGE

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Safest failsafe platform (500kg Load test)
- Double gusset braces and Strongbow full base brace systems
- Stronger RHS rear frame
- Swagelock step connection 50% stronger
- Strongest plated foot connection
- Lightweight

OPTIONS



POWER-MAX
ULTIMATE ELECTRICAL FAILSAFE



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	BASE BRACE	TRANSPORT CUBE (m³)
FP55-2	.61	580	11	Gusset	.33
FP56-3	.88	620	12	Gusset	.39
FP57-4	1.17	660	13	Gusset	.45
FP58-5	1.45	700	14	Gusset	.51
FP59-6	1.74	740	15	Gusset	.57
FP510-7	2.02	780	16	Strongbow	.63
FP511-8	2.30	820	17	Strongbow	.69
FP513-10	2.89	1050	26	Strongbow	1.22

AUSTRALIA'S LADDER SPECIALIST

NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS STANDARD RANGE

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Safest failsafe platform (500kg Load test)
- Stronger full gusset base brace - "GUSSET GUTZ"
- Channel section rear frame
- Swagelock step connection 50% stronger
- Strongest plated foot connection
- Lightweight

OPTIONS



POWER-MAX
ULTIMATE ELECTRICAL FAILSAFE



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FP55-2G	.61	580	11	.21
FP56-3G	.88	620	12	.26
FP57-4G	1.17	660	13	.32
FP58-5G	1.45	700	14	.39
FP59-6G	1.74	740	15	.46

All measurements are nominal and do not indicate 'exact weights and measures'

LADaMAX PRODUCT CATALOGUE | 5



ALUMINIUM PLATFORM STEP LADDERS

150KG RATED | AS 1892

ALUMINIUM PREMIUM RANGE

- Safest failsafe platform (500kg load test)
- Double gusset braces and Strongbow full base brace systems
- Stronger RHS rear frame
- Swagelock step connection 50% stronger
- Strongest plated foot connection

OPTIONS



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	BASE BRACE	TRANSPORT CUBE (m³)
PS5-2	.61	580	9	Gusset	.33
PS6-3	.88	620	10	Gusset	.39
PS7-4	1.17	660	11	Gusset	.45
PS8-5	1.45	700	12	Gusset	.51
PS9-6	1.74	740	13	Gusset	.57
PS10-7	2.02	780	14	Strongbow	.63
PS11-8	2.30	820	15	Strongbow	.69
PS13-10	2.89	860	24	Strongbow	1.22
PS15-12	3.45	1050	26	Strongbow	1.4

All measurements are nominal and do not indicate 'exact weights and measures'

6 | PRODUCT CATALOGUE LADaMAX

ALUMINIUM STANDARD RANGE

- Safest failsafe platform (500kg Load test)
- Stronger full gusset base brace - "GUSSET GUTZ"
- Channel section rear frame
- Swagelock step connection 50% stronger
- Strongest plated foot connection

OPTIONS



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
PS5-2G	.61	580	9	.33
PS6-3G	.88	620	10	.39
PS7-4G	1.17	660	11	.45
PS8-5G	1.45	700	12	.51
PS9-6G	1.74	740	13	.57

WWW.LADAMAX.COM.AU

MOBILE ORDER PICKER WAREHOUSE RANGE

150KG RATED | AS 1892



ALUMINIUM

- Safest failsafe platform (500kg Load test)
- World's safest aluminium platform
- Complete mobility castors
- Safety integrated hand rail
- Double gusset braces up to and including 6'ft platform height



OPTIONS

SAFETY GATE

PLATFORM KICKBOARD

CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
SM5-2	.61	580	12.5	.33
SM6-3	.88	620	14	.39
SM7-4	1.17	660	15	.45
SM8-5	1.45	700	16	.51
SM9-6	1.74	740	17	.57
SM10-7	2.02	780	19	.63
SM11-8	2.30	820	20	.69

NON-CONDUCTIVE SAFE FOR ELECTRICAL WORK

FIBREGLASS

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Safest failsafe platform (500kg Load test)
- World's safest aluminium platform
- Complete mobility castors
- Safety integrated hand rail
- Double gusset braces up to and including 6'ft platform height



OPTIONS

SAFETY GATE

PLATFORM KICKBOARD

CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FSM5-2	.61	580	11	.33
FSM6-3	.88	620	12	.39
FSM7-4	1.17	660	13	.45
FSM8-5	1.45	700	14	.51
FSM9-6	1.74	740	15	.57
FSM10-7	2.02	780	16	.63
FSM11-8	2.30	820	17	.69

All measurements are nominal and do not indicate 'exact weights and measures'

AUSTRALIA'S LADDER SPECIALIST

LADaMAX PRODUCT CATALOGUE | 7



STEP LADDERS SINGLE SIDED

150KG RATED | AS 1892

ALUMINIUM

- Swagelock step connection 50% stronger
- Stronger full gusset base brace - "GUSSET GUTZ"
- Side arm locks
- Strongest foot connection
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
SS042	1.20	470	5	0.07
SS062	1.80	545	7	0.12
SS082	2.40	620	9	0.19
SS102	3.00	695	14	0.26
SS122	3.60	770	16	0.35

NON-CONDUCTIVE SAFE FOR ELECTRICAL WORK

FIBREGLASS

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Swagelock step connection 50% stronger
- Stronger full gusset base brace - "GUSSET GUTZ"
- Side arm locks
- Strongest plated foot connection
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FSS042	1.20	470	5	0.17
FSS062	1.80	545	11	0.21
FSS082	2.40	620	15	0.26
FSS102	3.00	695	19	0.36
FSS122	3.60	770	23	0.49

All measurements are nominal and do not indicate 'exact weights and measures'

8 | PRODUCT CATALOGUE LADaMAX

WWW.LADAMAX.COM.AU

STEP LADDERS DOUBLE SIDED

150KG RATED | AS 1892



ALUMINIUM

- Swagelock step connection 50% stronger
- Stronger full gusset base brace - "GUSSET GUTZ"
- Side arm locks
- Strongest foot connection
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
DS032	.90	435	7	0.07
DS042	1.20	470	8	0.1
DS062	1.80	545	10	0.17
DS082	2.40	620	13	0.26
DS102HA	3.00	695	20	0.36
DS122HA	3.60	770	22	0.49
DS142HA	4.20	845	32	0.62
DS162HA	4.80	920	40	0.77

NON-CONDUCTIVE SAFE FOR ELECTRICAL WORK

FIBREGLASS

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Swagelock step connection 50% stronger
- Stronger full gusset base brace - "GUSSET GUTZ"
- Side arm locks
- Strongest plated foot connection
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FDS032	.90	435	6	0.07
FDS042	1.20	470	8	0.1
FDS062	1.80	545	12	0.17
FDS082	2.40	620	16	0.26
FDS102	3.00	695	22	0.36
FDS122	3.60	770	26	0.49

All measurements are nominal and do not indicate 'exact weights and measures'

AUSTRALIA'S LADDER SPECIALIST

LADaMAX PRODUCT CATALOGUE | 9



EXTENSION LADDERS

150KG RATED | AS 1892

ALUMINIUM EXTENSION LADDERS

- Interlocking side rails for safety and stability
- Strongest flat top 'D' rung
- Easy flow rope system
- Large flat feet
- Swagelock 'D' rung connection stronger
- Braided rope
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
XT082	2.4/3.9	420	14	0.14
XT102	3.0/5.1	420	17	0.18
XT122	3.6/6.3	420	20	0.22
XT132	3.9/6.9	420	22	0.23
XT142	4.2/7.5	420	23	0.25
XT162	4.8/8.4	420	27	0.29
XT182	5.4/9.6	420	31	0.32
XT202	6.0/10.8	420	33	0.36

All measurements are nominal and do not indicate 'exact weights and measures'

NON-CONDUCTIVE SAFE FOR ELECTRICAL WORK

FIBREGLASS EXTENSION LADDERS

- Purpose designed for electrical contractors
- Rung replacement system available
- Easy slide acetel blocks
- Easy flow braided rope system
- UV inhibitors
- Interlocking side rails for safety, rigidity and stability
- Strongest flat top 'D' rung
- Large solid ladder boots - for extra support
- Upper section is free of rope
- Pole chain as standard
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FXT082	2.7/3.9	390/405	17	0.18
FXT102	3.3/5.1	390/405	20	0.22
FXT122	3.9/6.3	390/405	25	0.25
FXT142	4.5/7.5	390/405	28	0.29
FXT162	5.1/8.5	390/405	31	0.34

10 | PRODUCT CATALOGUE LADaMAX

WWW.LADAMAX.COM.AU

NEXUS HEIGHTMASTER


Our pioneering helmet combines an advanced high performance liner for improved impact with modern recreational styling - including a replaceable 4-point adjustable EN 12492 chinstrap.

ATTRIBUTES

- High performance liner provides extra shock and penetration protection according to EN 12492
- Easily replaceable chinstrap for improved hygiene
- Chinstrap side adjusters for improved wearer fit and comfort
- Polyester webbing ensures that it doesn't catch on workwear Velcro



SAFEST
High performance
liner inside



Product Codes: S16E*FMR (Wheel Ratchet Vented) / S30NL (Nexus Liner) / S30NY (EN 12492 Chinstrap)
*Insert colour of helmet (i.e. W for White)



STANDARD



OPTIONAL



APPROVED TO

[EN 12492]
[ANSI/ISEA] Class C | LT
[AS/NZS 1801]

CONFORMS TO

[EN 50365]
[EN 397] LD | -40°C
(In respect of shock and penetration)



SPECTRUM SECURE PLUS

ABS safety helmet system with integrated over spectacles to deliver grade B EN 166 impact protection and ANSI/ISEA Z87+. Also suitable for wearers of prescription eyewear.

ATTRIBUTES

- Eyewear provides extra lateral and bottom coverage and provides extra protection against particles
- Anti-scratch and anti-mist coating on eyewear provides improved durability and visibility
- Soft nose bridge for enhanced wearer comfort
- Full over spectacle adjustment built in to ensure the user can obtain a perfect fit
- **NEW** Spectrum with badge holder available



Product Codes: S20*R (Wheel Ratchet) / S20*RL (SecurePlus Wheel Ratchet) / S20*RF (Vented Wheel Ratchet) / S20*RLF (SecurePlus Vented) / S576 (Spare Over Spectacles)
/ S576SE (Spare Smoke Over Spectacles) For Spectrum Badge Holder add SBH to product code
*Insert colour of helmet (i.e. W for White)

STANDARD



OPTIONAL



HELMET APPROVED TO

[EN 397] LD | MM | -40°C
[EN 50365]

VENTED

[ANSI/ISEA] Class C | LT

UNVENTED

[EN 397] 1000V a.c.
[ANSI/ISEA] Class E | LT
[CAN/CSA] Z94.1-05

OVER SPECTACLES APPROVED TO

[EN 166] 1 | B | T
[EN 170] 2C-1,2
[ANSI/ISEA] Z87+
[CAN/CSA] Z94.3-07

SAFER/SAFE*

Over spectacles with
Grade B Impact protect

VISION SECURE PLUS

Our industry-leading head protection system offers wearers of prescription glasses total safety reassurance with moulded integrated eye protection uniquely certified to EN 166 grade A high impact levels and ANSI/ISEA Z87+.

ATTRIBUTES

- Optical clarity to Class 1 for continuous use - standard on all Centurion face protection
- Grade A High Energy Impact Protection to EN 166: providing the highest impact protection possible within EN 166 - better than any other integrated eyewear on the market
- Large side pull tabs enable the wearer to quickly and easily move the visor up and down even when wearing gloves
- Includes anti-scratch and anti-mist coating for improved durability and visibility



STANDARD



OPTIONAL



HELMET APPROVED TO

[EN 397] 1000V a.c | LD | MM | -40°C
[ANSI/ISEA] Class E | LT

VISOR APPROVED TO

[EN 166] 1 A | T
[EN 170] 2C-1.2
[ANSI/ISEA] Z87+

SAFER/SAFE*

Grade A impact protection



Product Codes: S10PLUSEWA (Slip Ratchet) / S10PLUSEBA (Wheel Ratchet) / S10PLUSECA (SecurePlus Wheel Ratchet) / S577 (Spare clear visor)
*Insert colour of helmet (i.e. W for White)

NEXUS SECURE PLUS

Our multi award winning helmet combines advanced industrial safety standards with modern recreational styling including a 4-point chinstrap for added stability, security and comfort.

ATTRIBUTES

- SecurePlus 4-point quick release chinstrap for added stability and comfort
- Chinstrap side adjusters for improved wearer fit and comfort
- Micro peak for maximum upward visibility
- Polyester webbing ensures that it doesn't catch on workwear Velcro



STANDARD



OPTIONAL



APPROVED TO

[EN 397] LD | MM | -40°C
[EN 50365]
[AS/NZS 1801]

UNVENTED

[EN 397] 1000V a.c
[ANSI/ISEA] Class E | LT | -40°C
[CSA/CAN] Class E

VENTED

[ANSI/ISEA] Class C | LT | -40°C
[CSA/CAN] Class C



SAFER

4-point chinstrap for increased stability



Product Codes: S16E*RL (Wheel Ratchet) / S16E*L (Slip Ratchet) / S16E*RLF (Wheel Ratchet, Vented) / S16E*LF (Slip Ratchet, Vented)
*Insert colour of helmet (i.e. W for White)

TECHNICAL DATA SHEET

CONCEPT VULCAN

FEATURES AND BENEFITS

- The Concept Vulcan glass fibre reinforced nylon safety helmet is designed for use in industries where there is a risk from high levels of heat.
- Premium Grade Nylon and glass fibres provides high performance and optimal strength to weight ratio for the ultimate wearer protection at temperatures of -20° to 150°.
- Meets BS EN 397:2012+A1:2012 standard, LD, MM, -20°C, +150°, 1000v.
- Unique design, provides an extended nape, ensuring increased neck protection
- Available with 2 point EN 397 Leather chinstrap
- Premium "Twist 2 Fit" wheel ratchet for improved head and nape protection.
- Full system compatibility with a range of certified accessories for different tasks.
- Available in any colour * subject to minimum order quantities
- Suitable for custom branding.



CONCEPT Vulcan

Defying Heat, Redefining Safety.

Prepare for a technological evolution with Concept Vulcan, setting new standards in extreme operating conditions. This powerhouse thrives in temperatures reaching a scorching height of +150°c.



TECHNICAL DATA SHEET

CONCEPT MIPS

Mips

FEATURES AND BENEFITS

- The Mips® safety system is designed to provide added safety for helmets in many accidents. For certain impacts, the Mips system can reduce harmful forces that might otherwise be transferred to the user's head
- Premium Grade ABS provides high performance and optimal strength to weight ratio for the ultimate wearer protection.
- Meets BS EN 397:2012+A1:2012 standard, EN50365 LD, MM, -40°C.
- Unique design, provides an extended nape, ensuring increased neck protection
- Complete with 4 point SecurePlus EN 397 quick release chinstrap
- Available with full or reduced peak for maximum upward visibility.
- Premium "Twist 2 Fit" wheel ratchet for improved head and nape protection.
- Full system compatibility with a range of certified accessories for different tasks.
- Suitable for custom branding.



CONCEPT Mips®

The Concept helmet, now with Mips® Safety System, offers a sleek fusion of style and enduring protection.

Embrace unparalleled protection with our most powerful helmet, now seamlessly fortified with the cutting-edge Mips® technology for an unparalleled head protection system.



ENTRY MODEL – POTENTIA

Made from HDPE (High Density Polyethylene)

- ✓ ANSI I
- ✓ Available as vented and non-vented
- ✓ Full range of accessories including attachable peak
- ✓ Customizable branding options

Advantages of HDPE

Durability: HDPE is impact-resistant, : Its energy-absorbing properties make it ideal for shock-absorbing applications, such as in helmets making it ideal for safety helmets and protective gear.

Lightweight: Despite its strength, HDPE is lightweight, which enhances user comfort without compromising safety.

Weather Resistance: It withstands harsh environmental conditions, including UV radiation, moisture, and temperature extremes, ensuring long product life.

Chemical Resistance: Resistant to many chemicals, solvents, and corrosive substances, making it suitable for various industries.

Recyclable: HDPE is fully recyclable and can be repurposed into new products, contributing to a cradle-to-cradle lifecycle approach.

Low Moisture Absorption: Minimizes degradation due to moisture exposure, maintaining its integrity in humid environments.



EXTOL – MID RANGE MODEL

- ✓ Made from HDPP (High-Density Polypropylene)
- ✓ Additional comfort enhancements to entry level helmet
- ✓ Ratchet fixing – precise, secure and easy
- ✓ Forestry version available
- ✓ Complies with ANSI Z89.1 Type I, CAN-CSA Z94.1-05 standards
- ✓ Comprehensive accessory compatibility – includes attachable peaks

Advantages of HDPP

High Strength-to-Weight Ratio: Providing excellent durability without adding excessive weight.

Chemical Resistance: HDPP is resistant to a wide range of chemicals, acids, and alkalis, making it useful in industrial environments.

High Temperature Resistance: It can withstand higher temperatures than HDPE, making it suitable for more demanding applications.

Low Moisture Absorption: Like HDPE, HDPP absorbs very little moisture, maintaining its strength and durability even in humid or wet conditions.

Recyclable: HDPP is recyclable, supporting sustainability goals and contributing to the circular economy.

Fatigue Resistance: It's highly resistant to repeated stress and bending, which is beneficial in products like helmets that may experience frequent impacts or strain.

UV Resistance: Enhancing its performance in outdoor environments.



T2 ELITE – ANSI II

- ✓ Crafted from High-Density Polypropylene (HDPP) – ensuring superior durability and impact resistance.
- ✓ Complies with ANSI Z89.1 Type II and CAN-CSA Z94.1-05 standards – for reliable protection in both the US and Canada.
- ✓ Vented and non-vented options – optimized for breathability and user preference in various environments.
- ✓ Comprehensive accessory compatibility – includes attachable peaks, ear defenders, and visors to enhance safety and convenience.
- ✓ Twiceme® Technology (ICE & Asset Management RFID) – integrates In Case of Emergency (ICE) and asset management systems for safety and traceability.
- ✓ Upgraded ratchet adjustment system – provides precise, secure, and easy-to-use head fitting.
- ✓ Enhanced comfort padding – designed for all-day wear without compromising on safety.
- ✓ MIPS® (Multi-directional Impact Protection System) available as an option – offers advanced protection against rotational forces.
- ✓ Height safety-ready – ideal for working at heights with ergonomic design and secure fit.
- ✓ Anti-static and Arc Flash tested – for environments with electrical risks and static-sensitive applications.
- ✓ Customizable branding options – available for corporate identity and personalization.
- ✓ Extended lifespan with recyclable materials – supports sustainability efforts in PPE



ARMIS KEY TO GROWTH

Expansion into High-Growth Segments:

- Climbing-style helmets are in increasing demand.
- The ANSI Type II version opens access to a large US market, addressing a segment currently underserved in our range.

Accessory Upsell Potential:

- Detachable peaks (including full brim options), creating less SKUs for distributors and upsell opportunities.

White-Label Entry-Level Variant - Potential:

- Opens new revenue streams via partnerships with resellers and distributors who want a branded helmet without developing their own.

Supports Sustainability Narrative:

- Using HDPE & HDPP in Armis, it strengthens our environmental credentials—an increasingly important factor in purchasing decisions.



NEW AIRPRO SECURE PLUS BUMP CAP

Our flagship baseball bump cap designed to provide unrivalled head retention and wearer comfort. The first ever baseball bump cap to incorporate a ratchet adjustment system.

ATTRIBUTES

- Innovative new ratchet adjustment
- Crown ventilation for increased cooling
- Treated with Dupont Teflon for easy cleaning and improved hygiene
- Liner manufactured from ABS for optimal strength
- Peak options available: Full (50mm), Reduced (30mm)
- Side Scoops available (MOQ 500 units)

NEW Up to 50% better head retention and stability*



STANDARD



OPTIONAL



APPROVED TO
EN 812 | -40°C



Product Codes: S38*BR (Standard Peak, 50mm) / S38*BRP (Reduced Peak, 30mm)
*Insert Colour code of cap, e.g. BR for Navy Blue / ** Additional colours, side scoops and peak lengths are available subject to MOQ's. Please contact sales for more information.

AIRPRO BUMP CAP

Our bump cap has been designed for maximum breathability, maximum comfort and minimum weight, with approval to EN 812.

ATTRIBUTES

- Designed to provide maximum breathability for increased coolness
- One of the lightest Bump caps around at only 135g
- Treated with Dupont® Teflon® fabric protector, enabling small spills and grime to be easily wiped away
- Peak options available: Full (50mm), Reduced (30mm), Micro (15mm)
- Side Scoops available (MOQ 500 units)

Providing comfort, safety and style



STANDARD



OPTIONAL



APPROVED TO
EN 812 | -40°C



Product Codes: S38*BR (Standard Peak, 50mm) / S38*BRP (Reduced Peak, 30mm) / S38*BRSP (Micro Peak - Navy Blue) / S38*BRSPSS (Reduced Peak with Side Scoops for Ear Defender Compatibility - Navy Blue)

*Insert Colour code of cap, e.g. BR for Navy Blue / ** Additional colours, side scoops and peak lengths are available subject to MOQ's. Please contact sales for more information.

COOL CAP BUMP CAP

Our fashion-led CoolCap combines high ventilation, high flexibility and reassuring protection against minor bumps and scrapes to the head.

ATTRIBUTES

- Cap is fitted over an ABS liner to provide lightweight head protection
- Corporate badging via embroidery or transfer print

STANDARD



APPROVED TO
EN 812 | -40°C

OPTIONAL



Product Codes: S28*BR (Standard Peak, 50mm) / S28*BRP (Reduced Peak, 30mm - Navy Blue only)
*Insert Colour code of cap, e.g. BR for Navy Blue



High performance
ABS liner



Velcro strap for easy
adjustment

CAP 2000 BUMP CAP

Our robust CAP 2000 offers reassuring protection against minor bumps and scrapes to the head.

ATTRIBUTES

- Traditional panel baseball bump cap with ventilation mesh grills
- Complete with full 360° ABS liner

STANDARD



APPROVED TO
EN 812 | -40°C

OPTIONAL



Product Code: S18* (Standard Peak, 60mm)
*Insert Colour code of cap, e.g. BR for Navy Blue

CONTOUR XI

MULTI PURPOSE MOULDED FACE SCREEN

Designed to protect against EN 166 medium energy impact and Class 1 Arc Flash risks posed by electrical faults.

ATTRIBUTES

- Polycarbonate moulded screen for both impact protection and Arc protection
- Anti-Fog and Anti scratch coating
- Integrated Chinguard

STANDARD



APPROVED TO

[EN 166] 1 | B | T | 8 | 9 | 3
[EN 170] 2C-1,2
[ANSI/ISEA] Z87.1+
[Arc Class 1 GS-ET-29]

Product Codes: S810 Contour XI Multi Purpose Face Screen / S25WCONTAE Kit consisting of Nexus Helmet with Wheel Ratchet and Multi Purpose / Arc Class 1 Screen fitted to Contour Carrier



CONTOUR X

GENERAL PURPOSE MOULDED FACE SCREEN ATTRIBUTES

- Polycarbonate moulded screen for medium energy impact protection

APPROVED TO

[EN 166] 1 | B | T | 9 | 3
[EN 170] 2C-1,2
[ANSI/ISEA] Z87.1+

Product Codes: S800 Contour X General Purpose Face screen

Easy fit, general purpose face protection



Easy fit, Arc Class 1 approved face protection

CONTOUR CARRIER

GENERAL PURPOSE CONTOUR CARRIER ATTRIBUTES

- Low profile, pivoting system follows helmet contour
- Unique TPE rubber collar is fitted as standard to help block falling debris
- Multi pivot functionality for maximum versatility
- Contour clips for fitting to Nexus and Concept helmets

APPROVED TO

[EN 166]
[ANSI/ISEA] Z87.1+

Product Codes: S55 Contour Face Screen Carrier



Easy fit, low profile system

Nexus Visor

S601 | S602

The Nexus visor is engineered for the harshest conditions, offering superior protection at extreme temperatures. It features anti-scratch and anti-fog coatings, along with convenient pull-down tabs for easy use.

- Grade A Impact Protection
- Optical Class 1 lenses providing a wide field of vision
- Durable anti-scratch outer coating
- Anti-fog coating suitable for various environments
- UV Protection
- Available in Clear & Smoked
- Designed to be worn over prescription glasses without compromising comfort or visibility
- Compatible with Ear Defenders and Half-Mask Respirators
- Offers two mounting options for convenience
- Adjustable Ratchet System
- Compatible with Centurion Nexus Models





High Heat Gold Polycarbonate Face Screen

S760

Designed to withstand high heat infrared and inorganic chemicals. The High Heat Gold Face Screen features a gold coating that acts as a thermal barrier. This coating reflects radiant heat and prevents heat transfer – ensuring a high level of face protection.

- Provides superior protection by highly reflecting infrared radiation
- Gold coating – lightweight, ensuring comfort
- Flexible and durable coating that resists peeling or cracking

APPROVED TO

EN 166:2001

EN 171:2002 4-5



High Heat Duo Copper/Clear Triacetate Face Screen

S770

The Centurion high heat range is designed to offer high levels of head protection for the toughest of environments, to provide specialist protection in areas of high temperatures.

- Benefits from a Copper top screen that provides protection from radiant heat as well as infrared protection for the eyes, while a clear bottom screen provides improved visibility when looking down and moving around

APPROVED TO

EN 166 | 1 | B | 8 | 3

EN 170 | 2C -1,2

ANSI/ISEA | Z87.1+



iH5R LedLenser Torch

The iH5R is a versatile and compact lighting solution that seamlessly transitions from a headlamp to a handheld or body light. Its innovative design and advanced features make it perfect for various applications.

- Innovative Mounting System: Easily convert from a headlamp to a handheld or body light for maximum versatility.
- Dual Power Options: Operate with the included rechargeable lithium-ion battery or a standard AA alkaline battery (not supplied).
- Advanced Focusing Optics: Patented technology provides both flood (near) and spot (distance) illumination for optimal visibility.
- Helmet Mounting Options: Securely attach to helmets using the rubber-coated anti-slip head strap or the included adhesive mounting kit.
- Flexible Fastening Options: Metal clip on the exterior allows for various attachment methods.
- Lightweight Design: Weighs only 98g while delivering impressive lumen output.



EXH8R LedLenser Torch

This hands-free light source is specifically designed for safety and precision in highly flammable Ex-Zone 1/21 environments, ideal for professionals working around explosive gases, vapors, and dust. Featuring a patented Advanced Focus System and a rear red safety light, this head torch enhances visibility and ensures you can work confidently in hazardous conditions.

- **Advanced Focus System:** Customise the light beam for either spot or flood illumination with seamless adjustments.
- **Extended Battery Life:** Enjoy an impressive battery life of up to 45 hours, ensuring continuous use without frequent recharging.
- **Adjustable Beam Angle:** Angle the beam up to 55° to direct light exactly where it's needed.
- **Rear Red Safety Light:** Enhances visibility to others, indicating your position from behind.
- **Detachable and Washable Headband:** Designed for convenience and hygiene.
- **Comfortable and Secure Fit:**
 - Rubberised backing prevents slipping on helmets.
 - Overhead strap ensures total stability during use.
- **Easy Charging:** Simply dock the head torch onto the supplied cradle to recharge the high-capacity Li-ion battery—no need to remove the battery from the housing.
- **Magnetic Switch:** Allows for easy operation even when wearing gloves and protective gear.
- **Battery Charge Indicator:** Displays remaining battery life to ensure you know when it's time to recharge.
- **IP66 Protection:** Superior dust and water protection, making it suitable for challenging work environments.



Powerful Illumination:

- **Low Power:** 45 lumens, 60 meters for up to 45 hours
- **Standard Power:** 200 lumens, 130 meters for 10 hours

HF6R-Work LedLenser Torch

The Ledlenser HF6R WORK is the ideal companion for professionals seeking powerful illumination, robust design, and unmatched reliability on the job. With multiple brightness settings and advanced features, this head torch ensures you can see clearly and accurately in any situation.

- **Three Brightness Levels:** Tailor the light output to your needs with adjustable settings and a Boost mode for added intensity.
- **High Colour Rendering Index (CRI):** Enhanced color accuracy for tasks requiring precise color differentiation.
- **Directional Beam:** The perfectly balanced beam can be directed within 45° to optimize illumination.
- **Innovative Focus System:** Patent-pending Digital Advanced Focus System allows for seamless spot-to-flood focusing with an intuitive rotary wheel.
- **Durable Construction:** Built to withstand everyday use with robust materials and IP68 protection against dust and water ingress (submersible in fresh water up to 1.5 meters for 30 minutes).
- **Fuss-Free Charging:** Magnetic Contact Charge System enables easy battery recharging without removing the battery; full charge time is 225 minutes.
- **Flexible Mounting Options:** Includes a rubberized headband, helmet mount, and wall holder for versatile use.

Powerful Illumination:

- **Low Power:** 20 lumens, 25 meters for up to 60 hours
- **Mid Power:** 200 lumens, 80 meters for 8 hours
- **Standard Power:** 500 lumens, 140 meters for 3 hours
- **Boost Mode:** 800 lumens for 160 meters, providing a short burst of maximum power when needed



CONCEPT AIR FLIP UP VISOR KIT

Complete Respiratory Protection system with lightweight Flip up Polycarbonate visor -maximising all round vision and head coverage.

ATTRIBUTES

- 200 litres of filtered air per minute
- **NEW** lightweight Li-ion batteries, with a typical 8 hour usage before recharge
- Complete with a TH2PSL particulate filter and 5 Pre Filters



NEW AND IMPROVED
Battery up to 25% lighter*

STANDARD



APPROVED TO

EN 12941 TH2P

EN 166 1 | B | 9 | 3

CONCEPT AIR WELDING SHIELD KIT

Versatile ready to use welding respiratory protection system, complete with high performance Auto-Darkening welding filter and storage box.

ATTRIBUTES

- 200 litres of filtered air per minute
- High Performance Welding Shield with grinding mode
- Lightweight Li-ion battery, with 8 hour duration
- Complete with a TH2PSL particulate filter and 5 pre-filters

STANDARD



APPROVED TO

[EN 12941] TH2P

ADF LENS APPROVED TO

[EN 379] Class 1.1.1.1

WELDING SHIELD APPROVED TO

[EN 175] TH2P



NEW AND IMPROVED
Battery up to 25% lighter*

Product Codes: ConceptAir Kit - R23AWH9/13KIT **Component Codes:** Headpiece - R23AWH9/13 / ConceptAir 2000 Plus - R23/2000PLUS / Filter - R23P2/5 / Pre Filters - R23PF/10 / Battery - R23BLI / Battery Charger - R23BCLI / Headpiece Hose - R23HAHD

NEW NEVIS UNPOWERED FRESH AIR (FABA) SYSTEM

Unpowered Fresh Air Breathing Apparatus system suitable for use in Oxygen deficient atmospheres, including confined spaces and potentially explosive environments for short duration work

ATTRIBUTES

- Lightweight Full-Face Mask – excellent vision with an excellent fit
- 9m hose supplied in storage box
- Can be used with hose lengths up to 20m

STANDARD



APPROVED TO

[EN 138] Class 2

Product Codes: R26/400S (Small) R26/400M (Medium) R26/400L (Large) **Component codes:** R08NFF - Full Face Mask (S/M/L) / R26TAH - Twin Air Hose / R26/003P - Belt with hose connector / R269MH - 9 Metre Breathing Hose / R26SA - Strainer and Anchor pin assembly / R26/005 - Storage Box / M08SC3BAG - Mask Storage Bag **Optional Hose Lengths:** R26/20 - 20m Breathing Hose



NEW and IMPROVED
Modern, lightweight Full Face mask available in 3 sizes - with twin hose connection

NEW NEVIS POWERED FRESH AIR (FABA) SYSTEM

Powered Fresh Air Breathing Apparatus system. Air is supplied from an electrical supplied blower system for longer duration work.

ATTRIBUTES

- Up to 500L/min of supplied fresh air
- Lightweight Full-Face Mask – excellent vision with an excellent fit
- 9m hose supplied in storage box
- Can be used by 1 or 2 users up to 40m

STANDARD



APPROVED TO

[EN 138] Class 2

Product Codes: R26/500S (Small) R26/500M (Medium) R26/400L (Large) **Component codes:** R08NFF - Full Face Mask (S/M/L) / R26TAH - Twin Air Hose / R26/003P - Belt with hose connector / R269MH - 9 Metre Breathing Hose / R26SA - Strainer and Anchor pin assembly / R26/005 - Storage Box / M08SC3BAG - Mask Storage Bag / R26LWT110 - Mini-turbine 110v **Optional Hose Lengths:** R26/20 - 20m Breathing Hose / R26/30 - 30m Breathing Hose / R26/40 - 40m Breathing Hose **Optional Mini-turbine:** R26LWT240 - Mini-turbine 240v (UK or EU)



NEW and IMPROVED
Modern, lightweight Full Face mask available in 3 sizes - with twin hose connection

Eyewashes



Quickly rinse contaminants from eyes.

- GS-Plus™ spray heads deliver water for effective flushing.
- 11-1/2" diameter ABS plastic or stainless steel (SS) bowl.
- Wall mount with included bracket or floor mount with included pedestal and floor flange.
- ANSI-compliant sign included.
- Units are assembled and water tested prior to shipment.

DESCRIPTION	MODEL
Eyewash, Wall Mounted, Plastic Bowl	G1814P
Eyewash, Wall Mounted, SS Bowl	G1814
Eyewash, Wall Mounted, SS Bowl with Cover	G1814BC
Eyewash, Pedestal Mounted, Plastic Bowl	G1825P
Eyewash, Pedestal Mounted, SS Bowl	G1825
Eyewash, Pedestal Mounted, SS Bowl with Cover	G1825BC
Eyewash, Wall Mounted, All-SS	G1891

Eye/Face Washes



Quickly rinse contaminants from eyes and face.

- Extra large FS-Plus™ spray heads deliver more water in a larger spray pattern for facial coverage.
- 11-1/2" diameter ABS plastic or stainless steel (SS) bowl.
- Wall mount with included bracket or floor mount with included pedestal and floor flange.
- ANSI-compliant sign included.
- Units are assembled and water tested prior to shipment.

DESCRIPTION	MODEL
Eye/Face Wash, Wall Mounted, Plastic Bowl	G1750P
Eye/Face Wash, Wall Mounted, SS Bowl	G1750
Eye/Face Wash, Wall Mounted, SS Bowl with Cover	G1750BC
Eye/Face Wash, Pedestal Mounted, Plastic Bowl	G1760P
Eye/Face Wash, Pedestal Mounted, SS Bowl	G1760
Eye/Face Wash, Pedestal Mounted, SS Bowl with Cover	G1760BC

Emergency Showers



Quickly wash away contaminants with full body flush.

- 10" diameter ABS plastic or stainless steel (SS) shower head.
- Galvanized pipe and fittings. All stainless steel (All-SS) for corrosive environments.
- Accommodate common water supply pipe location with horizontal or vertical mounted units.
- ANSI-compliant sign included.

DESCRIPTION	MODEL
Emergency Shower, Vertically Mounted	G1635
Emergency Shower, Vertically Mounted, SS Head	G1635SSH
Emergency Shower, Horizontally Mounted	G1643
Emergency Shower, Horizontally Mounted, SS Head	G1643SSH
Emergency Shower, Horizontally Mounted, All-SS	G1691

Safety Stations



Combination eye or eye/face wash and shower station quickly washes contaminants from eyes, face and body.

- 10" diameter ABS plastic or stainless steel (All-SS) shower head.
- 11-1/2" diameter ABS plastic eye or eye/face wash bowl.
- stainless steel (SS) bowl for high traffic environments. Stainless steel bowl with cover (SS Bowl with Cover) for added spray head protection.
- Galvanized pipe and fittings. All stainless steel (All-SS) models for corrosive and high traffic environments.
- ANSI-compliant sign included.
- Eye and eye/face wash assemblies are water tested prior to shipment.

DESCRIPTION	MODEL
Safety Station with Eyewash, Plastic Bowl	G1902P
Safety Station with Eyewash, SS Bowl	G1902
Safety Station with Eyewash, SS Bowl with Cover	G1902BC
Safety Station with Eye/Face Wash, Plastic Bowl	G1950P
Safety Station with Eye/Face Wash, SS Bowl	G1950
Safety Station with Eyewash, SS Bowl with Cover	G1950BC
Safety Station with Eyewash, All-SS	
Safety Station with Eye/Face Wash, All-SS	G1991
Alarm for Safety Station	G1996

AP275-200

Portable Eyewashes

Quickly wash contaminants from eyes in low traffic areas, or where continuous supply of potable water is unavailable for plumbed units.

- Fill tanks with potable water and included G1540BA bacteriostatic additive. Replace water and additive every six months to ensure bacteria-free eyewash.
- G1562 includes eyewash and drench hose. Stainless steel pressurized tank is ideal for floor placement near any hazard or can be mounted on stainless steel dolly.
- G1540 gravity fed polyethylene unit includes eyewash only. Unit is wall mountable with included steel bracket.
- G1562HTR and G1540HTR heated units are ideal for cold weather environments down to -20°F.
- ANSI-compliant sign included.
- Units are assembled and water tested prior to shipment.

DESCRIPTION	MODEL
Portable Eyewash/Drench Hose Unit, 15 gallon	G1562
Portable Eyewash/Drench Hose Unit, 15 gallon with Heater and Insulation Jacket	G1562HTR
Dolly for Portable Eyewash/Drench Hose Unit	G1562DLY
Hand Cart for Portable Eyewash/Drench Hose Unit	G1562HC
Portable Eyewash, Gravity-Fed, 16 gallon	G1540
Portable Eyewash, Gravity-Fed, 16 gallon with Heater and Insulation Jacket	G1540HTR
Bacteriostatic Additive, Replacement	G1540BA




Faucet Mounted Eyewashes

Add-on eyewash allows faucet to be used as faucet or eyewash.

- Pull knob activates eyewash. Unit operates until knob is pushed back to original position.
- EyeSafe™ spray head outlets mount 3" apart to fit most faucets.
- EyeSafe-X™ large profile spray head outlets mount 5" apart to fit gooseneck faucets.
- G1200 and G1201 offer single motion activation with Faucet Control Valve. Faucet remains 'on' at preset temperature and flow of water is controlled by valve. Pull knob activates eyewash at any time regardless of control valve position.
- Units are assembled and water tested prior to shipment.

DESCRIPTION	MODEL
Faucet Mounted Eyewash, EyeSafe™ 3" spray head	G1100
Faucet Mounted Eyewash, EyeSafe-X™ 5" spray head	G1101
Faucet Mounted Eyewash, EyeSafe™ 3" spray head with Faucet Control Valve	G1200
Faucet Mounted Eyewash, EyeSafe-X™ 5" spray head with Faucet Control Valve	G1201

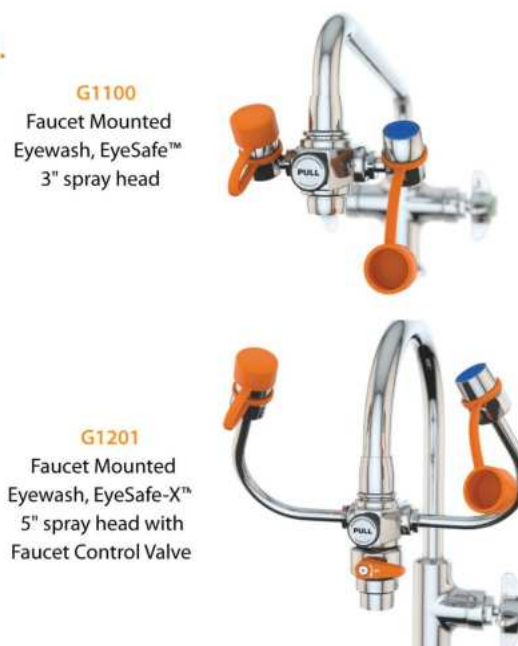

Cryogenic Loading Arm

It is suitable for transferring liquified gas at very low temperature, such as liquid natural gas, etc.

The swivel joints at cryogenic loading arm are designed with two-flanges structure, and make it easily replace the primary and secondary seals. The nitrogen purging system make the ball trace dry preventing the entry of atmospheric moisture. The swivel joints are manufactured by numerically controlled machines, specially designed seal makes the joint resistant to very low temperature.

The swivel joints and pipelines material are stainless steel grade 316L, and are welded according to special procedure and treated by special process. After strict inspection and test, we guarantee that every arm has excellent function performances.

1. Places applied: bottom close loading and unloading
2. Application: cryogenic ethylene, LNG, etc
3. Nominal Diameter: DN50-DN100
4. Material: pipeline-SS, swivel joints-SS, structure componets-CS
5. Design Temperature: -196°C to 100°C
6. Design Pressure: -0.06MPa-2.0MPa



Folding Stairs for Tankers

Folding stairs is specially designed to provide safe and efficient means of access between a loading platform and road or rail tankers.

Folding Stairs Features:

1. Fully balanced self-leveling Steps to automatically adjust to varying tanker heights.
2. Safety handrails and knee guards fitted as standard.
3. Hinged safety step to protect against accidentally trapping toes.
4. Pull-rope to assist returning stairs to "parked" position.
5. Vertical locking device for "parked" position with foot-peal release.
6. Extended outboard step to provide additional area and stability, for stepping onto the tanker top.
7. Rubber bumper to prevent sparking and reduce risk of tanker damage.

Applications:

Safe access from fixed platforms to the top of a Road Tanker, Rail Tank Wagon, or ISO Container to:

1. Inspect the tanker for safety and maintenance
2. Load the tanker
3. Check the load and take samples
4. Wash or decontaminate compartment

Benefits:


1. Safe, reliable and easy means of tanker access
2. Maintenance free spring cylinder and rotation joints
3. Fulfils current Health & Safety at Work requirements and promotes safe working practice on tanker tops

Specification:

1. Balancing type: spring cylinder
2. Operation mode: manual
3. Material: carbon steel



Folding Stairs

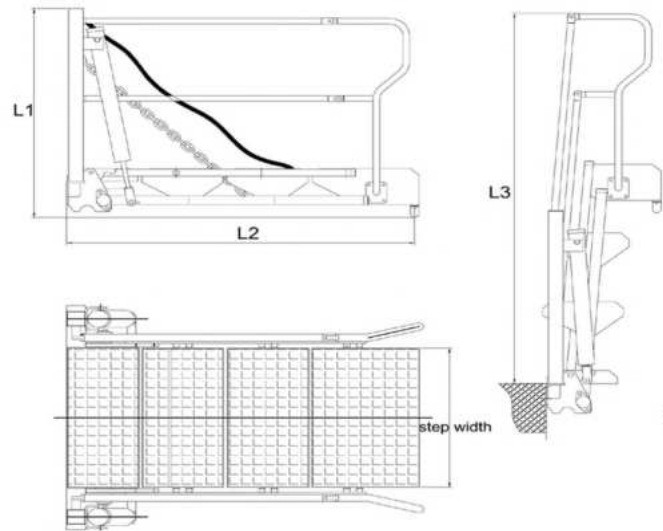

Model	Steps	Step Width (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Rail Size (mm)	Weight (kgs)
KTS-A	3	800	1210	1250	1820	/	195
KTS-B	3	800	1210	1250	1820	1400*1400	220
KTS-C	3	600	1210	1250	1820	/	115
KTM-A	4	800	1210	1650	2150	/	245
KTM-B	4	800	1210	1650	2150	1400*1400	260
KTM-C	4	600	1210	1650	2150	/	137
KTL-A	5	800	1210	2050	2550	/	270
KTL-B	5	800	1210	2050	2550	1400*1400	295
KTL-C	5	600	1210	2050	2550	/	165

Loading Platform

Loading platform is one kind of assembling loading and unloading platform, it is mainly composed of platform unit, steel structure rainshed and accessory equipment (folding stairs, loading arm, heat preservation building, etc.).

The surface of the platform is grid plate and checked plate with several methods of treatment for prevention corrosion such as painting, hot-dip zinc, electroplating and other technological process.

Steel structure canopy is installed on the ground by pillar, or directly installed on the platform, the roof surface is covered with color steel plate.

Assembling steel structure loading platform is the comprehensive operation platform which is equipped with fluid loading and unloading equipment for car and train, and is able to walk freely and safely.



Standard Emergency Shower and Eyewash



ESE-H

- Model ESE ESE-H
- Dimension All height — 2350mm
Shower height — 2150mm
Eyewash height — 1080mm
- Bore Supply water : 1-1/4" SUS304# stainless
Waste bore : 1-1/4" SUS304# stainless
Shower tube : 3/4" SUS304# stainless
Eyewash tube : 3/8" SUS304# stainless
- Connection Supply water : 1-1/4" D (PT)
Waste bore : 1-1/4" D (PT)
- Spray head Eyewash head : Nylon material · 50mmx44mm(H)
Include two kind filters ·
with yellow plastic floating cover ·
Basin dimension Ø345mm
Shower head : Nylon material ·
Dimension Ø200mm
- Hydraulic pressure Above 1 kg/cm²
- Action Shower : A stainless actuator (stay open or close)
Eyewash :
Hand and foot operated Hand push plate
with special 8 shape
stainless chain
- Features 1. All tubes are stainless SUS304# material · with
special antitrust process
2. Included sign (305 x 230mm · Chinese & English
language with graph)
3. Meet ANSI Z 358.1-2014 ·
CNS 14251 T 2048-1998 · Din 12899
- Dimension Error ±2%

Nonpressurized Self-contained Eyewash



- Model EEW-NP
- Type Nonpressurized self-contained
- Operation Pull down green eyewash panel firmly. Eyewash panel will drop to activate equipment and start the water stream.
User have to hold eyelids open and roll eyeball let water flow on all surfaces and infolds surrounding eyeball.
After flushing for 15 mins, push up green eyewash panel to the original place, the water will stop.
- Tank Dimension: 550(W)x550(D)x650(H)mm
HDPE material, anti UV & against flame
- Volume 80 Liter
- Effective capacity 40L, supply for above 15 mins wash work.
- Eyewash plate Dimension: 204(W)x326(L)x111(H)mm
HDPE material, anti UV & against flame
- Spray head Nylon material, provide more 1.5L/min water.
- Supply water Input pipe is silicon material with seal for avoiding leaking
- Drain water bore 1/2" PVC pipe. Emissions waste water to sink or waste water bottle.
- Sign Above the equipment
Dimension : 185(W)x200(H)mm
- Operation instruction Above the equipment left side
Dimension: 100(W)x250(L)mm
- Maintenance instruction Above the equipment right side
Dimension: 100(W)x250(L)mm
- Orgcure 500ml. While change the water of equipment once a bottle.

Accessories

- EEW-NP-MC Roller car
Dimension: 600(W)x600(D)x750/850(H)mm
SUS304# stainless material
- EEW-NP-WB Waste liquid bottle
Dimension: 36x57(H)cm · 46ml
PE material
Include drain valve & sign
- Orgcure Preservative additive
Only for self-contained eyewash · 500ml



EW-First-1



EW-First-2

Features

1. Easy to install
Choose a suitable place from using screws or components to be wall-mounted.
2. Convenient to use
The special setting base can be easy to take off eyewash bottle for opening the cover as use at once, and it is efficient to help emergency accident for first step at primary time.
3. Easy to operate
Setting base and eyewash bottle have items of operation and attention, meanwhile those let the user understand and operated easily.
4. Special design of eyewash bottle
The design of eyewash bottle sare very convenient to be held by operators and it is made LDPE material. Bottle can be kept pressing as easy to use, and press the saline solution for emergency wash eye.
5. Convenient to open a cover of eyewash bottle
A design in cover can be opened at primary time for supporting emergency accident. Furthermore, it is superior to prevent polluting the saline from dust and other matters.



EW-First-B

- | | EW-First-1 | EW-First-2 |
|--------------------|--|---|
| • Model | EW-First-1 | EW-First-2 |
| • Dimension | 220(W) × 480(H) × 98(D) mm | 440(W) × 480(H) × 98(D) mm |
| • Setting base | Adopt to be made of ABS plastic material. The base is convenient to take off eyewash bottle, and prevent the bottle from falling down on the floor. | |
| • Operating paster | Size : 195x75mm
Paster is made of water proof material, in addition it has Chinese/English bilingual edition that includes items of operation and attention for user understand and operation easily. | |
| • Mirror | None | Size : 98x78mm
User is convenient to check their face by themselves for understand injured situation |
| • Bottle quantity | One bottle
Special design of bottle is convenient for works pressing and flushing the saline solution. LDPE material, 750ml
Print the operations and cautions with English edition on bottle for convenient use. | Two bottles |

ACX POWER ASCENDER



Mit der akkubetriebenen Personenseilwinde ACX wird das Befahren einer Fassade oder Anlage sowie das Aufseilen von Lasten zum Kinderspiel. Um eine gewünschte Arbeitsposition zu erreichen, wird keine Muskelkraft mehr benötigt. Im Notfall kann die Steuerung des ACX mittels Fernbedienung vom Boden aus übernommen werden.

- Aufstiege ohne Muskelkraft
- Einfache Steuerung mittels intuitiv bedienbarem Gasgriff
- Fernbedienung mit bis zu 150 Metern Reichweite

ACX POWER ASCENDER KIT

	200 kg
	0-24 m/min
	13 kg
	33 x 28 x 27 cm
	1.25 x SWL
	IP 55
	-20° to +40° C
	POA-001



SUPER STATIC 11.0

	EN 1891-A:1998
	with stitched eye
	10, 15, 30, 60, 70, 90, 120 m
	11 mm
	Polyamide
	-35° to +45° C
	L-0531-LENGTH / L-0531-BL-LENGTH



EQUIPMENT LIFTING ROPE

	—
	25, 50, 100, 200 m
	11 mm
	Polyamide
	max. 100° C
	R-143-LENGTH



ACX BACK-UP SET

	0.290 kg
	SET-436



The battery operated ACX POWER ASCENDER makes scaling facades and facilities or roping up loads easy. Muscle strength is no longer required to reach a desired working position. In the event of an emergency, the ACX can be controlled from the ground with a remote control.

- Ascents without muscle power
- Simple control via operating lever that is intuitive to use
- Remote control with up to 150 meter range





MILAN 2.0 A-027

Evacuation device with 0.9 m/s abseiling speed, for 2 people, up to 500 m height, durable up to 30 years.

- Suitable for 2-person use and for shuttle services
- Abseiling heights of up to 500 m
- Rescue operations of any kind at any location



MILAN 2.0 POWER A-029

for electrical rescue over long distances, manual options available, lifting time: <2 min. for 10 m, max. 250 k

- Electrically operated rescue hoist with RDD
- enables effortless roping up, < 2 min for 10 m
- maximum lifting weight of 250 kg in an emergency

Version 10

DOLPHIN 3


THE NEXT-GEN REMOTE CONTROLLED LIFEBOUY

The Dolphin 3 can propel itself to rescue a casualty, faster than any skilled swimmer, while the rescuer can operate it with a remote controller to stay safe and dry.

SPECIFICATIONS

Dimension	100 cm(L) x 70 cm(W) x 25 cm(H)	Speed	max. 7 m/s
Weight	16.75 kg	Endurance	max. 70 min @3 m/s
Hull Material	LLDPE	Control Range	max. 800m (line of sight)
Waterproof	IP67	Towing capacity	up to 1000 kg

Note: Performance data is collected under standard conditions (flat water, no wind). Different environmental conditions might affect performance.

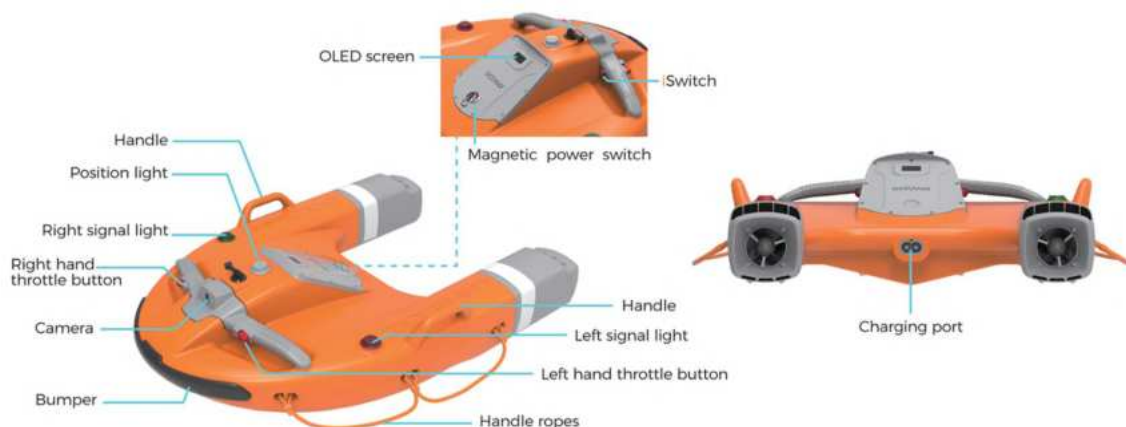

Key Features	DOLPHIN 3 Plus	DOLPHIN 3
Immediate ON	Yes	Yes
Magnetic Standby Mode	Yes	Yes
Onboard Control	Yes	Yes
Dropping From A Height	Yes	Yes
OLED Display	Yes	Yes
Dual GNSS	Yes	NA
Auto Return	Yes	NA
Self Righting	Yes	NA
Remote Monitor	Yes	NA
Charging Stand	Optional	NA
Search Light & Loudspeaker	Optional	Optional

Optional
 Loudspeaker
 Search light
 Charging stand

ARCA TIMUR SDN.BHD - Tel: 03-8068 9110 Fax: 03-8068 9110
Sales Department: +6012 306 3550; +6018 393 2555; +6016 418 5010

david@arcatimur.com azian@arcatimur.com
suyee@arcatimur.com sale@arcatimur.com

INTRODUCTION

- The Stretcher Bed can be put into the water by manual throwing or automatic launching.
- The operator remotely controls the Stretcher Bed to reach the drowning person, and the rescued person can grip the handles or buckle up the rescue belt to get rid of risks by lying on the Stretcher Bed.
- For those with poor self-rescue ability, the Stretcher Bed can move backward to scoop up the drowning person and bring them back to shore.
- The Stretcher Bed is able to heat up automatically, which is convenient for rescue in cold weather and can help the drowning person's body temperature recover.




**Save up to 4 Lives at a time
and Minimize Risk for Rescuers**



HIGHLIGHTS

- + Ergonomic & Safety Design
- + Tangle-Free Propellers
- + Automatic Heating Device
- + High Visibility
- + Ease to Use & Deploy in Seconds
- + Powerful Motors & Strong Buoyancy
- + Small Volumn
- + Goods Transport
- + Low Battery Warning
- + High Speed

FEATURES

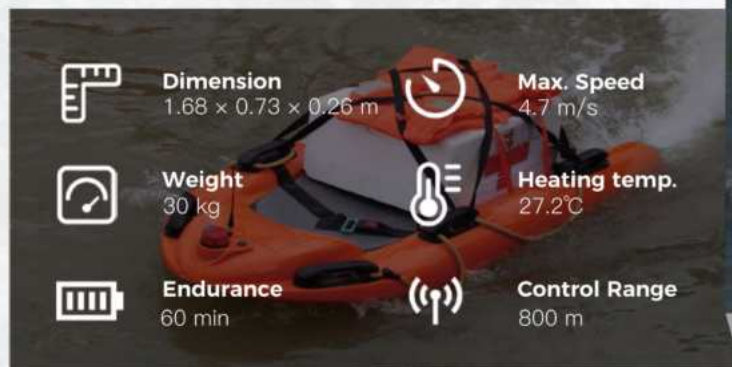

Floor Plate

SC-R Anti-slip floor plates are manufactured with the same materials as grating and stair treads. They are suitable for high exposure to salt water and offer high resistance to chemicals such as: acid, alkali and solvent liquids.

SC-R anti slip plates are non-conductive, non-magnetic and contain a fire retardant. Plates are approximately 4mm thick and supplied in different custom made sizes with a variety of anti-slip grits ranging from light to heavy duty. SC-R anti slip plates are ideal for wet or dry conditions where good slip resistance and traction are needed.

Staircare SC-R products are made to measure and since it is a finished product it can be used immediately.





Staircare SC-R Composite FRP Staircase Systems combine FRP grating, flooring, stair treads, structural shapes and handrails to an FRP System that provides non-corrosive, non-conductive resilient safe and versatile access.


Staircare SC-R Resilient, low maintenance FRP fiberglass reinforced polymer staircases built to measure, including embedded silicon carbide anti-slip grit for high slip resistance.

SC-R Solid Top Cover Grating

Molded square mesh with solid top cover offers bi-directional strength and are ideal for installations requiring multiple penetrations. Panels are available with silicon carbide anti-slip grit and offer light but strong Trench covers, Walkways, Cable troughs and Pit covers.

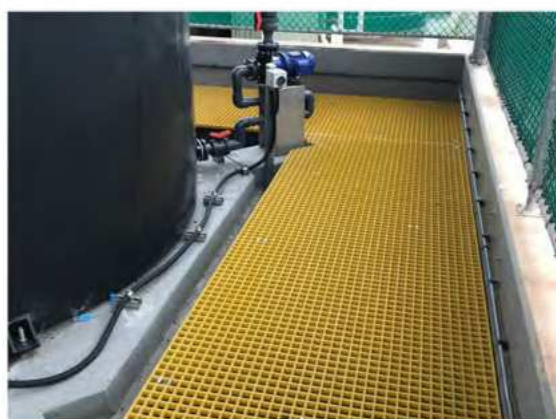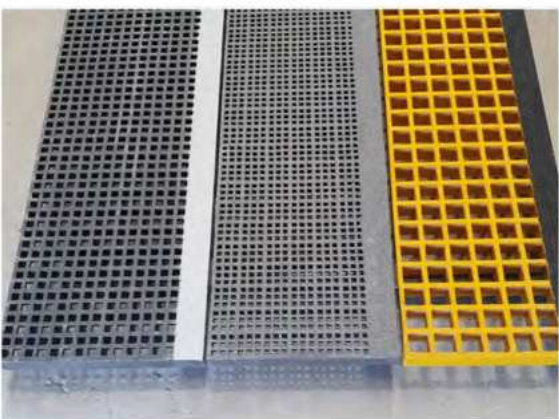

Staircare SC-R Made to Measure FRP Fabrication

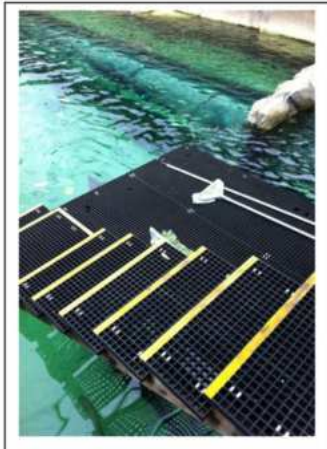

Flammable Cabinet

Specification:



Flammable Safety Cabinet										
Capacity Gal/L	Number of Doors	Style of Doors	Dimensions H*W*D/CM		Adjustable Shelves	Approved Regulation	N.W. Kg	G.W. Kg	Packing H*W*D/CM	Model No
4 Gal/15L	1	Manual Self-close	56*43*43	46*35*35	1	OSHA/NFPA CE/EN14470-1	27	35	72*53*53	SCM004Y SCS004Y
10 Gal/38L	1	Manual Self-close	64*59*60	54*51*52	1	OSHA/NFPA CE/EN14470-1	34	48	82*69*69	SCM010Y SCS010Y
12 Gal/45L	1	Manual Self-close	89*59*46	79*51*38	1	OSHA/NFPA CE/EN14470-1	44	56	108*70*57	SCM012Y SCS012Y
22 Gal/83L	1	Manual Self-close	165*60*46	154*52*38	3	OSHA/NFPA CE/EN14470-1	74	90	182*70*57	SCM022Y SCS022Y
30 Gal/114L	2	Manual Self-close	112*109*46	102*101*38	1	OSHA/NFPA CE/EN14470-1	86	102	130*120*57	SCM030Y SCS030Y
45 Gal/170L	2	Manual Self-close	165*109*46	155*101*38	2	OSHA/NFPA CE/EN14470-1	114	133	182*120*57	SCM045Y SCS045Y
54 Gal/204L	1	Manual Self-close	165*60*87	155*52*79	3	OSHA/NFPA CE/EN14470-1	120	140	184*70*97	SCM054Y SCS054Y
60 Gal/227L	2	Manual Self-close	165*86*86	155*78*78	2	OSHA/NFPA CE/EN14470-1	144	166	182*96*96	SCM060Y SCS060Y
90 Gal/340L	2	Manual Self-close	165*109*86	155*101*78	2	OSHA/NFPA CE/EN14470-1	164	186	182*120*96	SCM090Y SCS090Y


Spill Containment pallet

Specification:




Poly Spill Pallet								
Capacity Gal/L	Drum Quantity	Loading Weight	Mobile Type	N.W. Kg	G.W. Kg	Forklift Operation	Dimension H*W*D/CM	Model No
40/150	2	1300	Not Mobile	17	18	2 Side Operation	30*130*71	PSP102
53/200	4	2700	Not Mobile	34	35	4 Side Operation	30*130*130	PSP104

Project Gallery

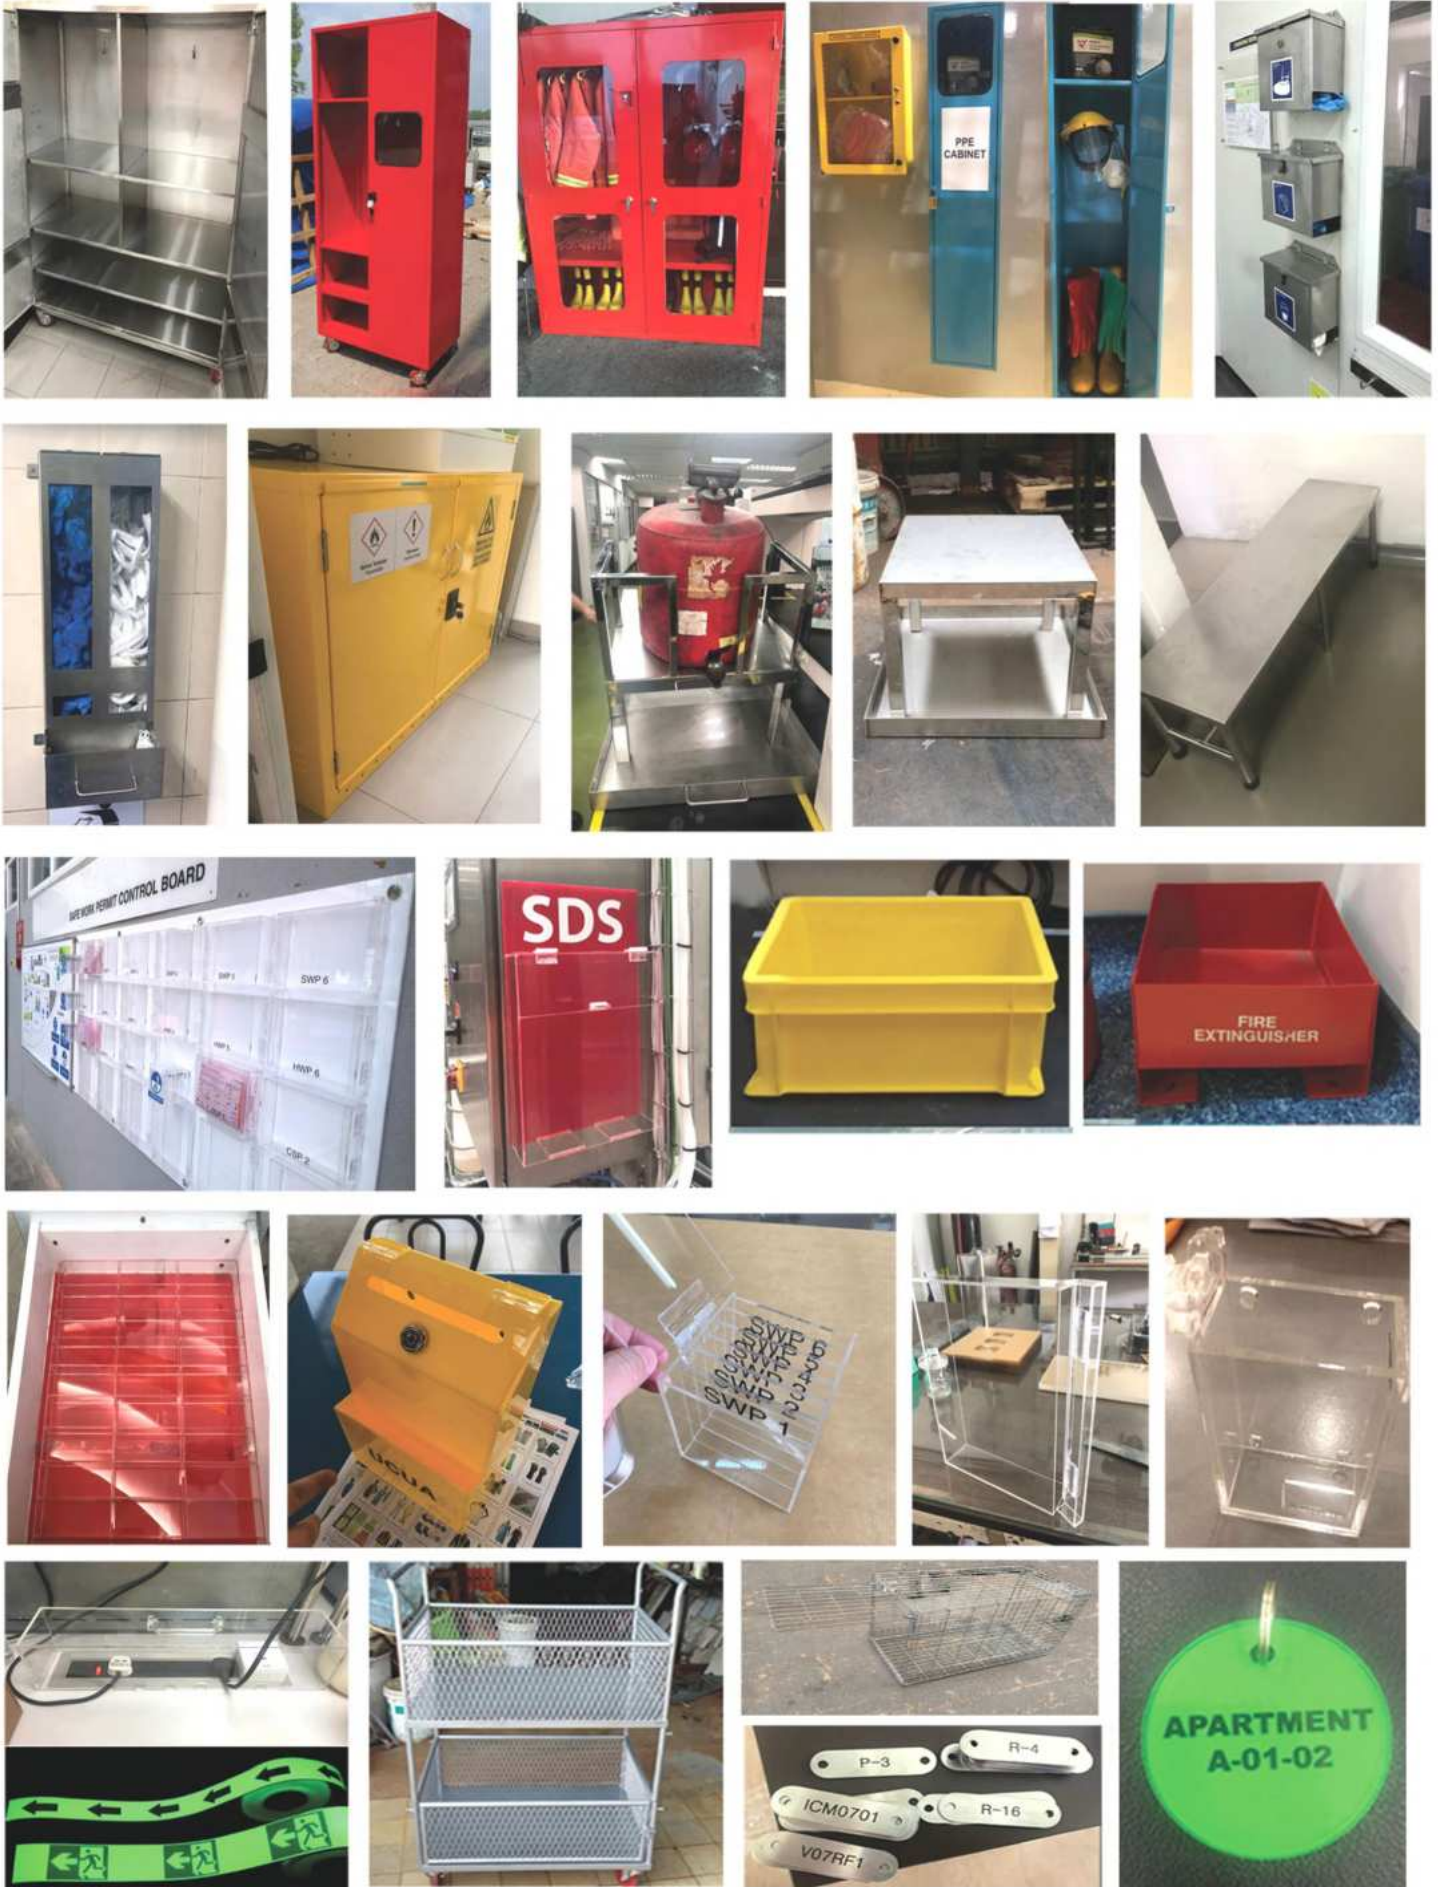


Project Gallery

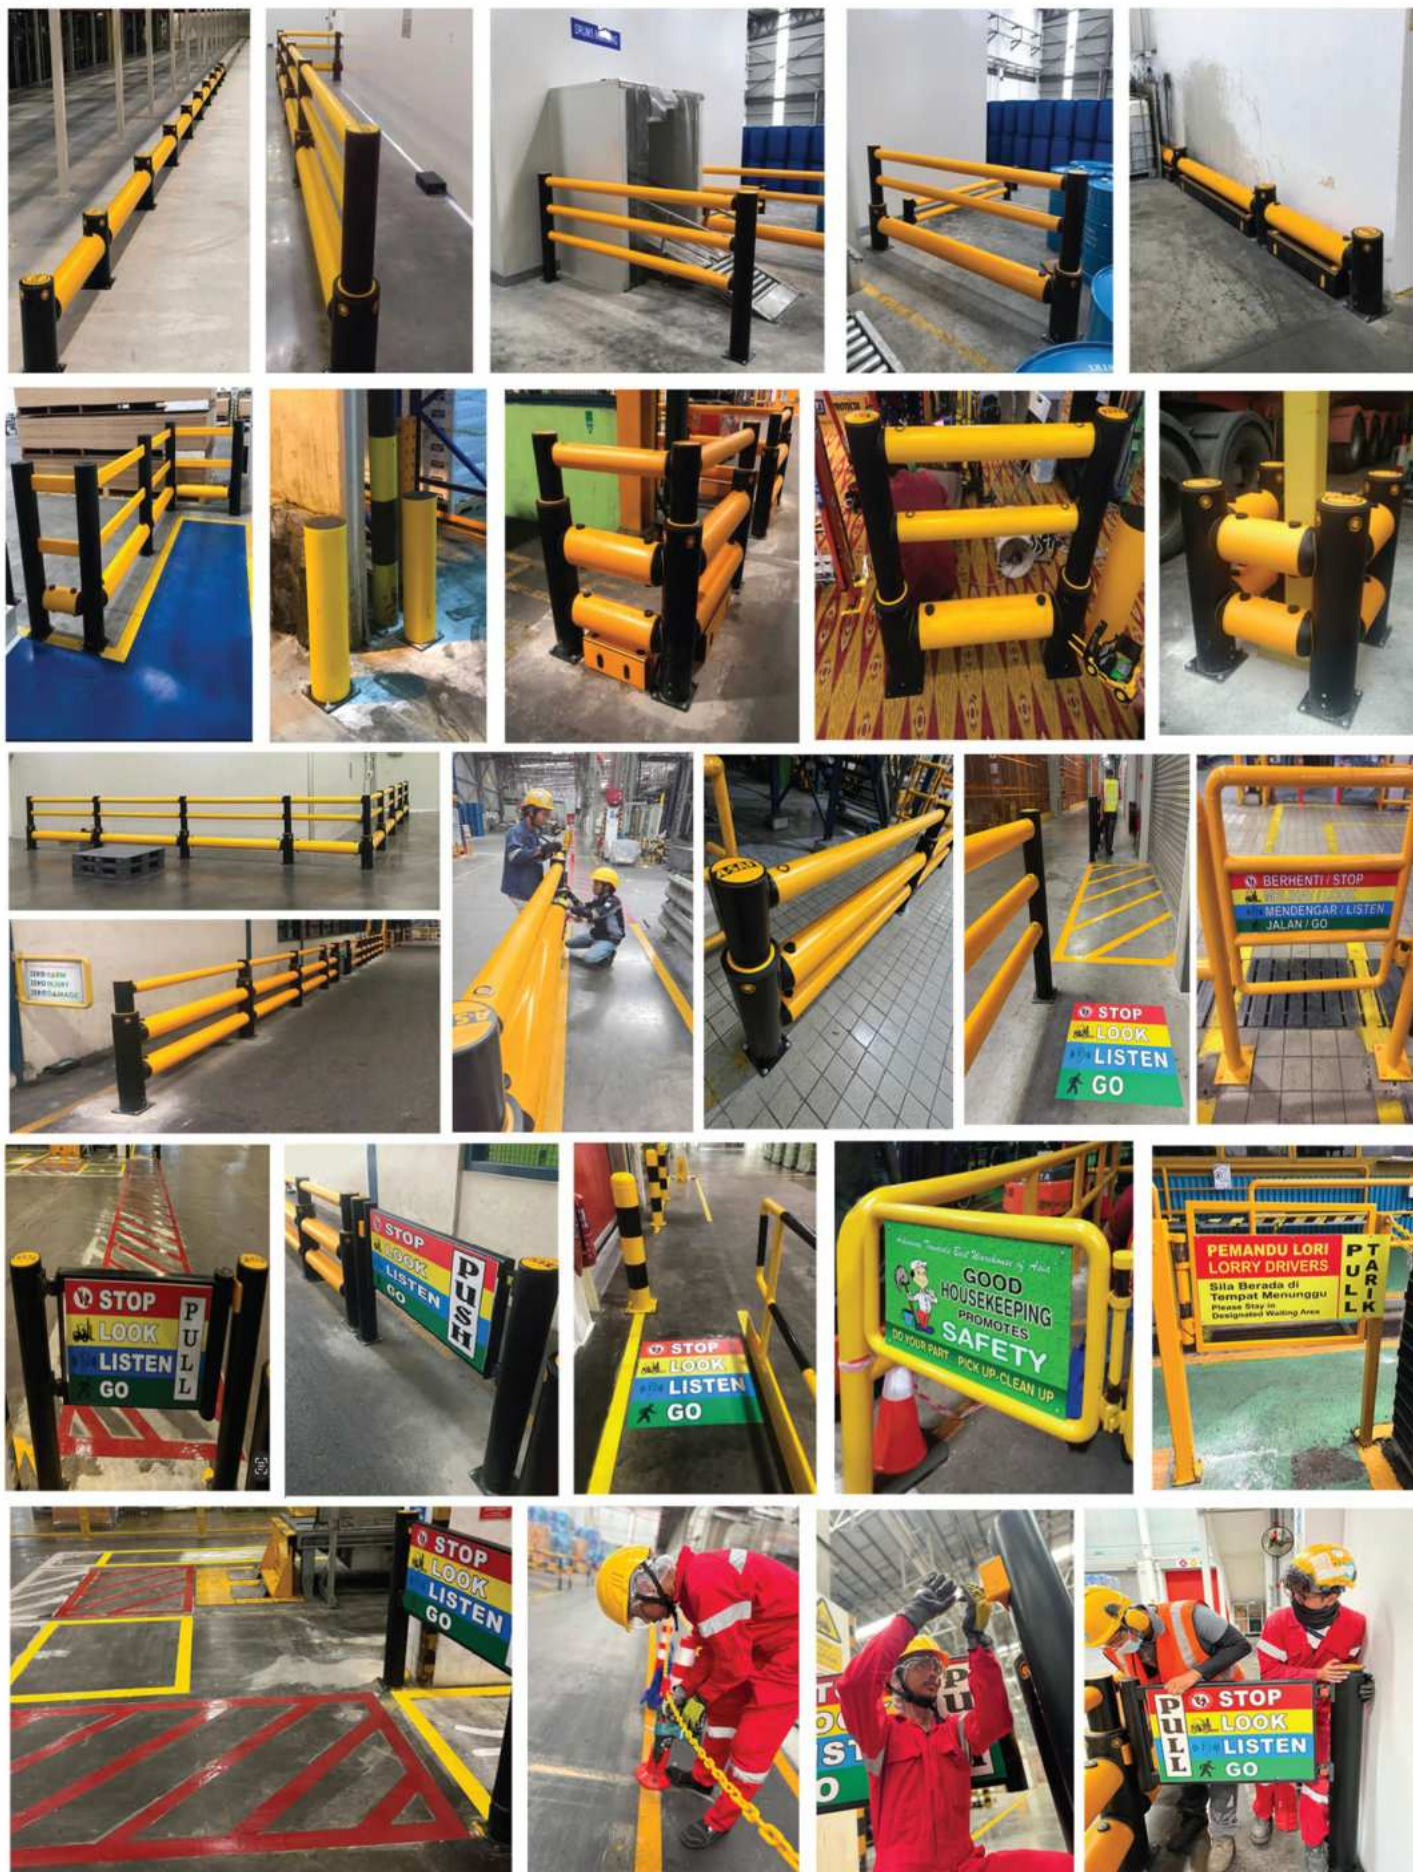


Project Gallery




Project Gallery

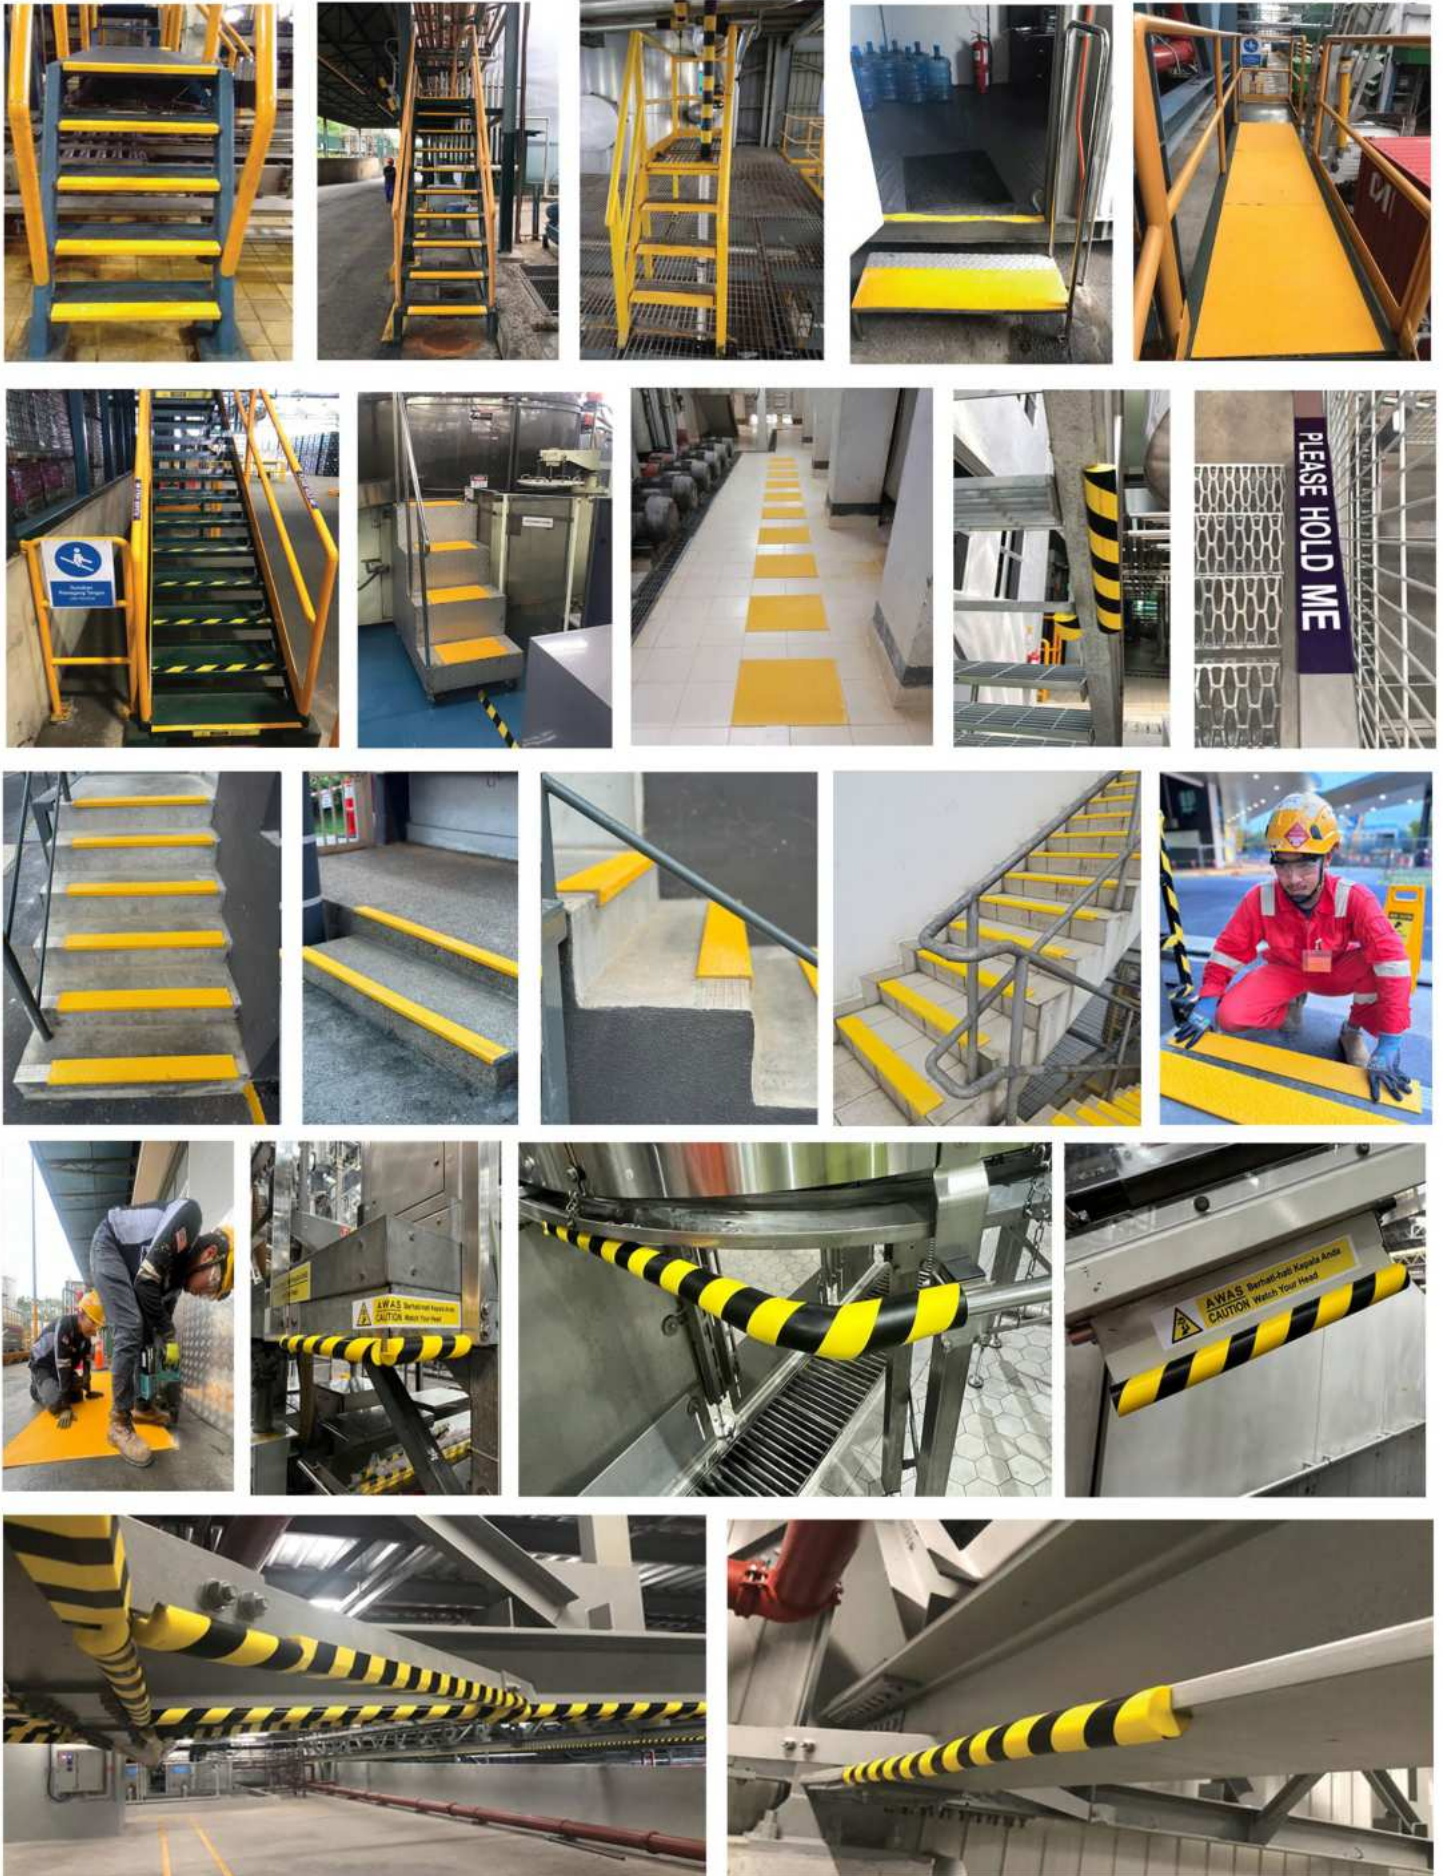


Project Gallery

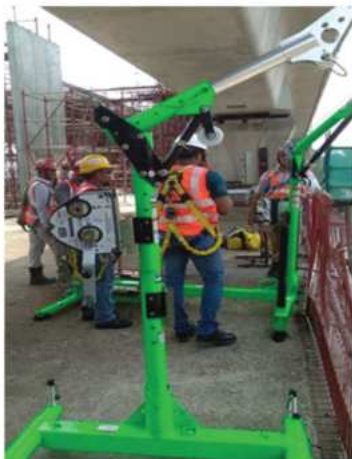

Project Gallery

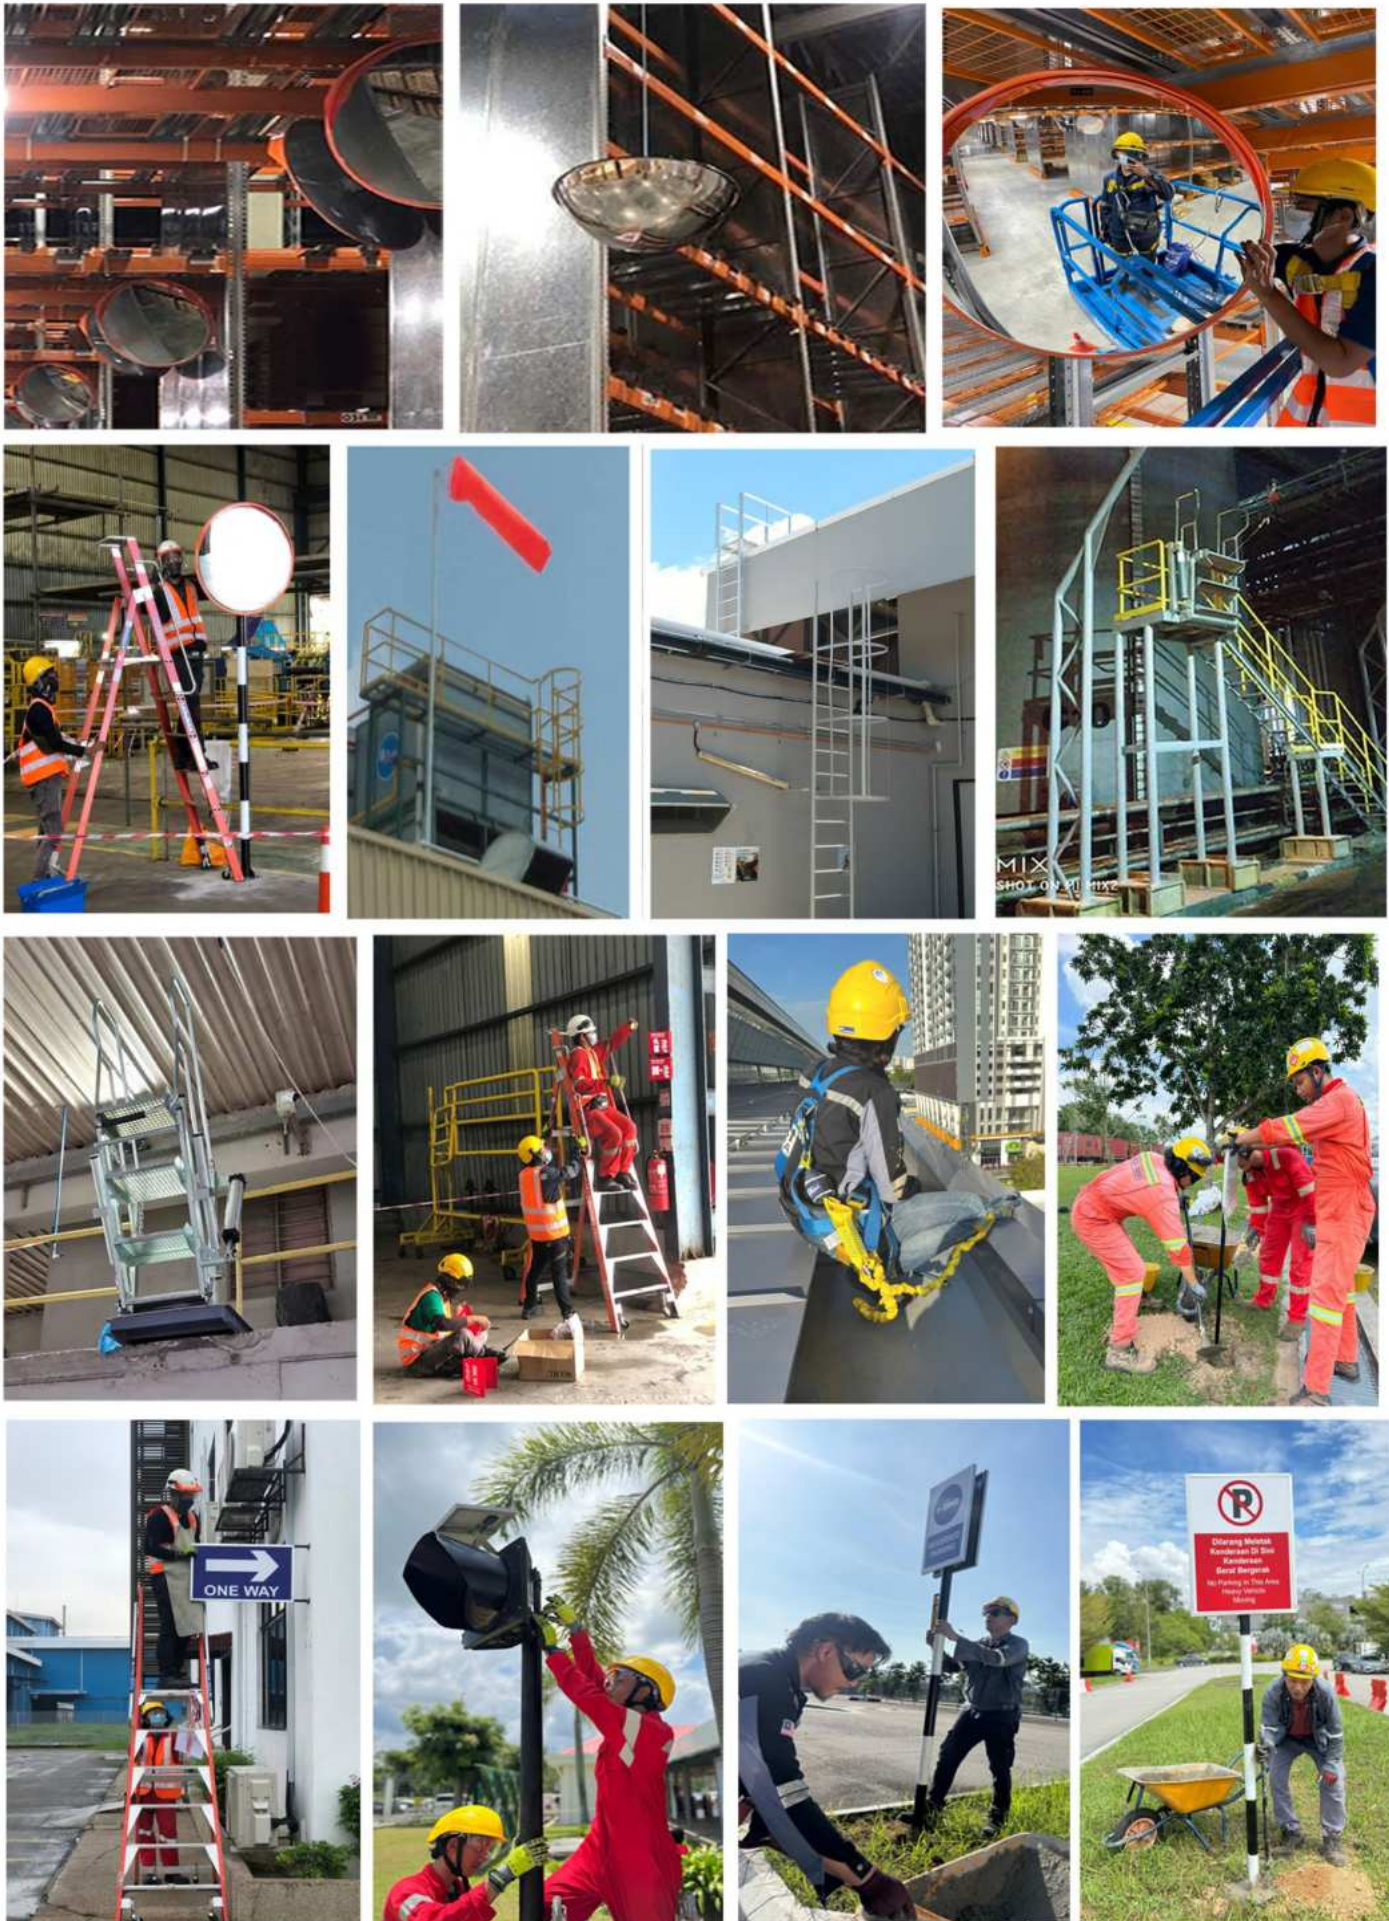

Project Gallery

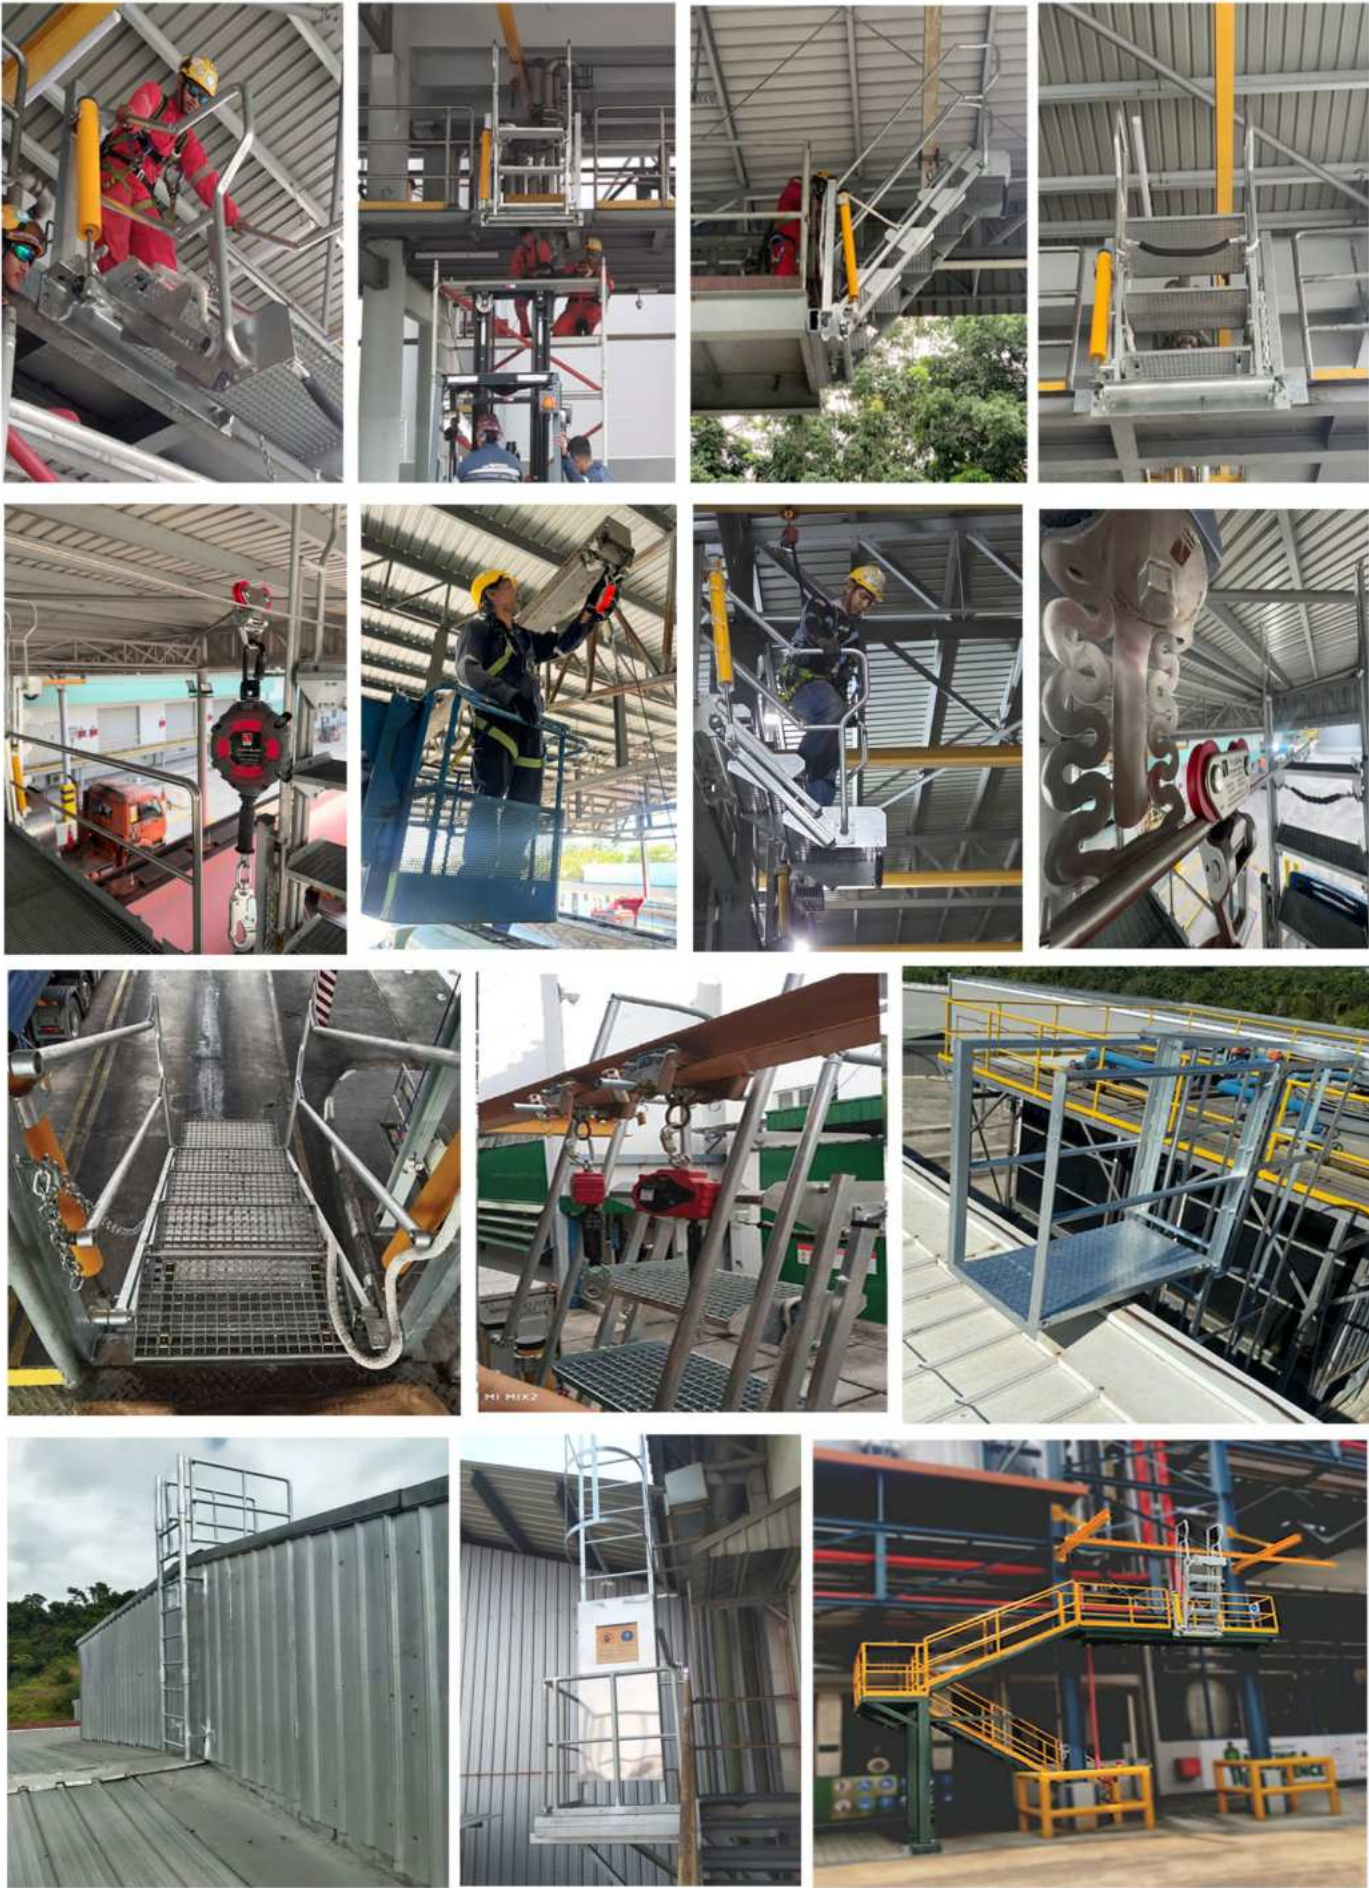

Project Gallery

